

An Improved Slotted Patch Antenna for RFID Application

Shishupal Kumar

Dept. of Wireless Communication and Computing
Indian Institute of Information Technology Allahabad,
India
Iwc2013016@iiita.ac.in

Nidhi Lal

Dept. of Wireless Communication and Computing
Indian Institute of Information Technology Allahabad,
India
Nidhi.2592@gmail.com

Kshitiza Singh

Dept. name of Wireless Communication and Computing
Indian Institute of Information Technology
Allahabad, India
Kshitizasingh@yahoo.com

Abstract— This paper proposed a radio frequency identification (RFID) Reader Antenna which operates on ISM band with frequency range from 902 to 928 MHz and bandwidth of the antenna is 58MHz. Antenna consist of rectangular patches on Rogers RO4360 substrate with microstrip feed line. Return loss of the antenna comes out to be about -39.98 dB on behalf of the frequency 907MHz. Gain of the proposed antenna is 5.21dB. This antenna is simulated on CST Microwave Studio and the results are thoroughly discussed in the paper.

Index Terms— ultra high frequency (UHF); radio frequency identification (RFID); microstrip feed line

I. INTRODUCTION

Radio frequency identification (RFID) has various applications, which includes identification and tracking of humans as well as animals, this can be done by tagging the antenna to the objects. Vehicular access control, hospitality, library, sports and healthcare are major applications of this RFID technique [1]. RFID is providing a replacement of the barcode with high reliability and more accuracy. Due to low cost and simplified design process patch antennas are popular and researchers are doing their work in this field [2, 3]. Return loss of the proposed antenna is much better than the general reference which is normally taken as -10dB. Voltage Standing Wave Ratio (VSWR) of the antenna is ≤ 2 and is 1.02 and gain of the antenna is 5.21dB, which is acceptable for Radio frequency identification application.

Resonant frequency of the proposed antenna is 907MHz and is covering range from 879 to 937 MHz, thus bandwidth of the antenna is 58MHz [4, 5]. The total area covered by the proposed antenna is 100x75 mm². This

Paper shows a simple patch antenna with waveguide feeding mechanism for 907 MHz radio frequency identification application.

II. RELATED WORK

In [1], a planer RFID reader antenna is proposed for UHF communication, this antenna is used to produce strong magnetic field with uniform field distribution. RFID applications are become popular because of their tracking and monitoring behaviour. RFID has shown their potentials in improving healthcare quality and reducing the medical errors in hospitals [2]. A miniature RFID antenna is proposed in [3], which is used for metal object detection. This antenna can detect the presence of metal within range of 1.5 meter and by using single-layer substrate; we can minimize the cost of RFID reader antenna. RFID tags are used by the suppliers to put on their packages shipped to warehouse centers. Packages have a reader and four antennas which are placed on top, bottom and two sides [4] [5]. A monopole tag antenna for RFID application is proposed in [6] and is capable of providing a maximum readable range of 5.6 meter along with isotropic radiated power of 4W. Antenna design given in [6] is very compact as compared to other tag designs and can easily integrate with other portable devices. In spite of small size of antenna, it is providing a good coverage and radiation performance. It has many advantages like fast and

convenient operation, tolerance in different environment and identification of various fast moving objects[7]-[8]. [9-18] has shown optimized performance for antenna.

III. ANTENNA STRUCTURE

Fig. 1 shows the design of simple patch antenna for RFID

Application, and corresponding dimensions are given in Table-

1. The antenna is composed of rectangular patch and a microstrip feed line with waveguide port.

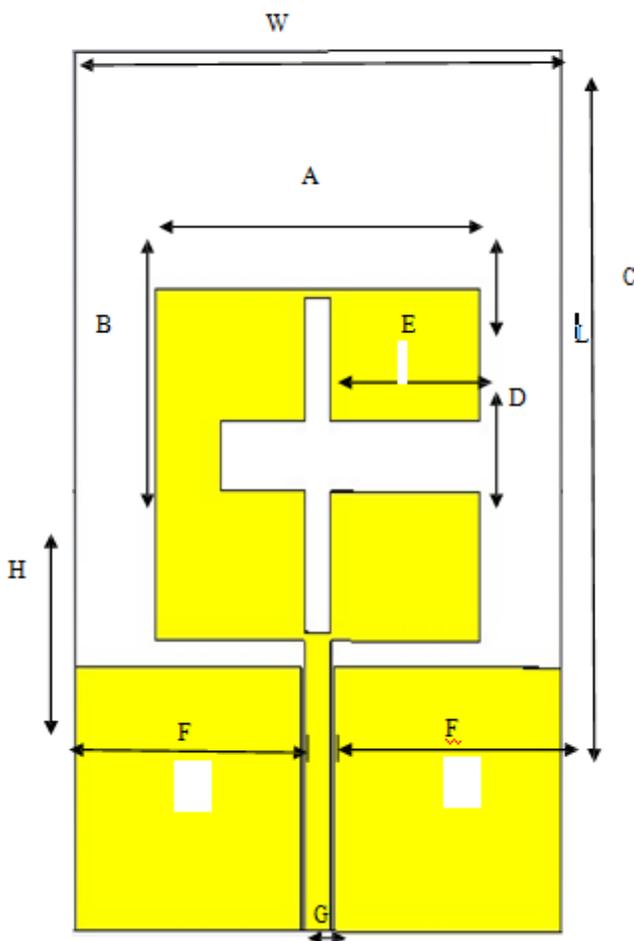


Fig 1. Configuration of Anticipated Antenna

IV. DESIGN SPECIFICATIONS

The anticipated antenna has been simulated on transient solver in CST Microwave Studio simulation software tool. This Antenna design simulator CST is installed on windows 7 very easily. List of considerations used in the design of antenna are specified further down in table 1.

Parameter	Value (mm)
W	75
L	100
A	50
B	40
C	12
D	20
E	23
F	22.5
G	4
H	30

This antenna was instigated on Rogers RO4360 substrate using thickness 0.5 mm and comparative dielectric permittivity is taken to be about 6.15.

V. RESULTS AND DISCUSSION

Simulation of the proposed antenna is done on CST Microwave Studio and results are described below. Fig. 2 displays return loss contrasted with frequency for the projected antenna and Fig. 3 describes gain of the antenna and Fig. 4 shows E-field and H-field, Voltage Standing Wave Ratio (VSWR) of the antenna is 1.02 and is shown in Fig. 5. Voltage Standing Wave Ratio (VSWR) of the antenna is ≤ 2 and is 1.02.

A. RETURN LOSS

Fig. 2 diagrams return loss contrasted with frequency for the planned antenna -10 dB return loss along with frequency of the proposed antenna ranges between 879 to 937 MHz, hence achieved bandwidth of the antenna is 58 MHz, which comes under ISM band range, so it can be used for the RFID

applications [6, 7]. It has been observed that changing the dimensions of the patch of the antenna affect both return loss and frequency.

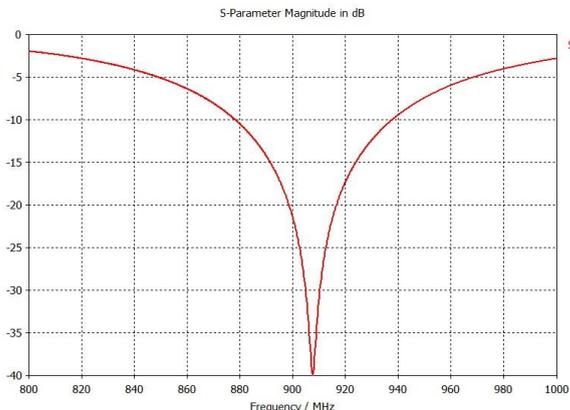


Fig. 2 Displays return loss contrasted with frequency

B. RADIATION PATTERN

The gain of an antenna is described as the intensity of radiation of the antenna in a particular direction, which relates the concept of directivity and electrical efficiency of antenna. [19] Radiation pattern is the representation of obtained gain, including direction as a function. [20-23] Gain of the proposed antenna is 5.21dB at the resonant frequency 900 MHz, which is shown in Fig. 3.

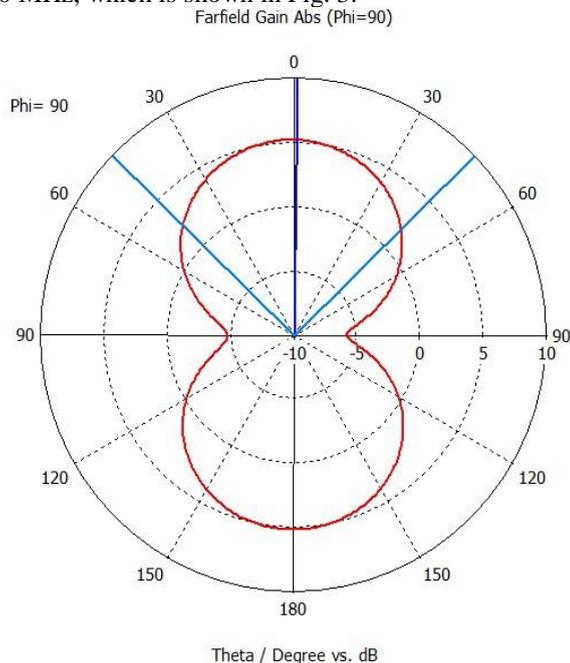


Fig. 3 Gain of proposed Antenna

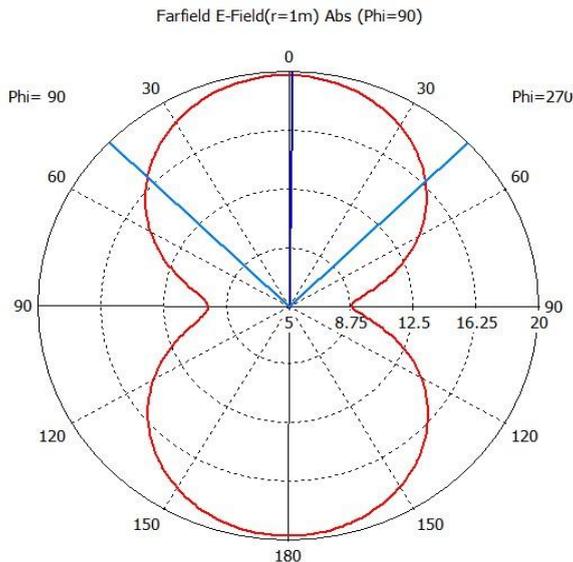


Fig 4(a). E-Field of Proposed Antenna

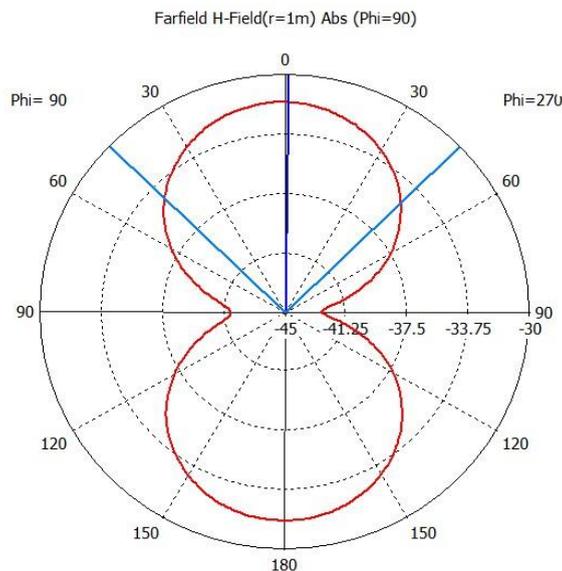


Fig. 4(b). H-field of proposed antenna

C. VOLTAGE STANDING WAVE RATIO (VSWR)

VSWR of the ideal antenna is 1, and is of proposed antenna 1.02, which is very close to ideal antenna for whole bandwidth of 58 MHz, which is shown in Fig. 5.

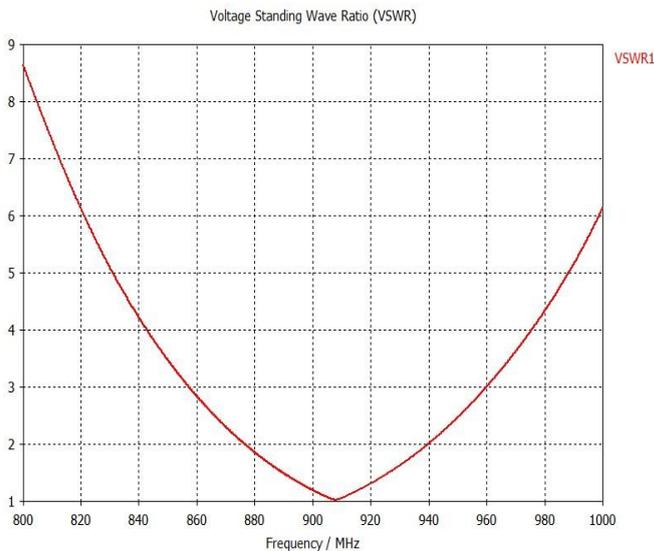


Fig. 5 VSWR of Proposed Antenna

VI. CONCLUSION

In this paper, simple patch antenna for RFID application has been proposed, which operates in frequency range 879 to 937

MHz Data rate of the RFID application in frequency range 902 to 928 MHz is moderate to high and covering range of antenna is 1 to 12 meter. The proposed antenna has shown good results in terms of return loss and VSWR. This antenna can be used in various RFID applications, like vehicular access control, Hospitals & healthcare, human identification, museum and sports. This antenna design fulfills the requirements of RFID applications but can also be used in other fields of wireless applications.

REFERENCES

- [1] AnkangRen; Changying Wu; Ting Wang; Bo Yao, "A novel design for UHF near-field RFID reader antenna based on traveling wave," *Communication Technology (ICCT)*, 2010 12th IEEE International Conference on , vol., no., pp.239,242, 11-14 Nov. 2010
- [2] Sani, A.; Rajab, M.; Foster, R.; Yang Hao, "Antennas and Propagation of Implanted RFIDs for Pervasive Healthcare Applications," *Proceedings of the IEEE* , vol.98, no.9, pp.1648,1655, Sept. 2010
- [3] Sung-Lin Chen, "A Miniature RFID Tag Antenna Design for Metallic Objects Application," *Antennas and Wireless Propagation Letters, IEEE* , vol.8, no., pp.1043,1045, 2009
- [4] Zhong-Min Liu; Hillegass, R.R., "A 3 patch near field antenna for conveyor bottom read in RFID sortation application," *Antennas and Propagation Society International Symposium 2006, IEEE* , vol., no., pp.1043,1046, 9-14 July 2006
- [5] Rao, K. V S; Nikitin, P.V.; Lam, S.F., "Antenna design for UHF RFID tags: a review and a practical application," *Antennas and Propagation, IEEE Transactions on* , vol.53, no.12, pp.3870,3876, Dec. 2005
- [6] Hsien-Wen Liu; Chang-Fa Yang; Chia-Hao Ku, "Novel Miniature Monopole Tag Antenna for UHF RFID Applications," *Antennas and Wireless Propagation Letters, IEEE* , vol.9, no., pp.363,366, 2010
- [7] Moussa, M.S.; Kouki, A.B., "Design of a small microstrip tag antenna for RFID applications," *Fly by Wireless Workshop (FBW)*, 2011 4th Annual Caneus , vol., no., pp.1,4, 14-17 June 2011
- [8] Hirvonen, M.; Pesonen, N.; Vermesan, O.; Rusu, C.; Enoksson, P., "Multi-system, multi-band RFID antenna: Bridging the gap between HF- and UHF-based RFID applications," *Wireless Technology, 2008. EuWiT 2008. European Conference on* , vol., no., pp.346,349, 27-28 Oct. 2008
- [9] Ali, Z.; Singh, V.K.; Singh, A.K.; Ayub, S., "Bandwidth Enhancement of W Slot Microstrip Antenna Using Stacked Configuration," *Communication Systems and Network Technologies (CSNT)*, 2012 International Conference on , vol., no., pp.31,34, 11-13 May 2012
- [10] Singh, V.K.; Ali, Z.; Singh, A.K., "Dual Wideband Stacked Patch Antenna for WiMax and WLAN Applications," *Computational Intelligence and Communication Networks (CICN)*, 2011 International Conference on , vol., no., pp.315,318, 7-9 Oct. 2011
- [11] Singh, V.K.; Ali, Z.; Singh, A.K.; Ayub, S., "Dual Band Microstrip Antenna for UMTS/WLAN/WIMAX Applications," *Communication Systems and Network Technologies (CSNT)*, 2013 International Conference on , vol., no., pp.47,50, 6-8 April 2013
- [12] Ali, Z.; Singh, V.K.; Singh, A.K.; Ayub, S., "Wide Band Inset Feed Microstrip Patch Antenna for Mobile Communication," *Communication Systems and Network Technologies (CSNT)*, 2013 International Conference on , vol., no., pp.51,54, 6-8 April 2013 doi: 10.1109/CSNT.2013.20
- [13] Ashutosh Kumar Singh,R.A.Kabeer,M.Shukla, Z. Ali, V. K. Singh, Shahanaz Ayub "Performance analysis of first iteration koch curve fractal log periodic antenna of varying flare angles" *Central European Journal of Engineering (CEJE)*, Springer ISSN: 1896 1541Volume 3, Issue 1, pp 51-57, March, 2013.
- [14] Ali, Z.; Singh, V.K.; Singh, A.K.; Ayub, S., "E-Shaped Microstrip Antenna on Rogers Substrate for WLAN Applications," *Computational Intelligence and Communication Networks (CICN)*, 2011 International Conference on , vol., no., pp.342,345, 7-9 Oct. 2011
- [15] Vinod Kumar Singh, Zakir Ali, A. K. Singh, Shahanaz Ayub "Dual band triangular slotted stacked microstrip antenna for wireless applications" *Central European Journal of Engineering (CEJE)*, Springer ISSN: 1896 1541Volume 3, Issue 2, pp 221-225 June, 2013.
- [16] Singh, A.K.; Kabeer, R.A.; Ali, Z.; Gurjar, D., "Performance analysis of compact Koch fractal antennas at varying iterations," *Engineering and Systems (SCES)*, 2013 Students Conference on , vol., no., pp.1,5, 12-14 April 2013
- [17] Zakir Ali, Vinod Singh, Ashutosh Kumar Singh et al., "Compact Dual Band Microstrip Patch Antenna for WiMAX lower band Application" In the proceedings of IEEE International

- Conference on Control, Computing, Communication and Materials-2013(In Press)
- [18] Siddhartha Mishra, Akash Kumar, Ashutosh Kumar Singh, "Dual Band Textile Antennas for ISM Bands" In the proceedings of IEEE International Conference on Control, Computing, Communication and Materials-2013(In Press)
- [19] Lal, Kumari Nidhi, and Ashutosh Kumar Singh. "Modified design of microstrip patch antenna for WiMAX communication system." Students' Technology Symposium (TechSym), 2014 IEEE. IEEE, 2014.
- [20] Lal, Nidhi, et al. "A Heuristic EDF Uplink Scheduler for Real Time Application in WiMAX Communication." arXiv preprint arXiv:1501.04553 (2015).
- [21] Lal, N.; Singh, A.P.; Kumar, S., "Modified trial division algorithm using KNJ-factorization method to factorize RSA public key encryption," Contemporary Computing and Informatics (IC3I), 2014 International Conference on , vol., no., pp.992,995, 27-29 Nov. 2014
- [22] Bhaskar-Semwal, V., et al. "Accurate location estimation of moving object In Wireless Sensor network." International Journal of Interactive Multimedia and Artificial Intelligence 1.4 (2011).
- [23] Lal, Nidhi. "An Effective Approach for Mobile ad hoc Network via I-Watchdog Protocol." arXiv preprint arXiv:1412.8013 (2014)