

Relativistic Forces Between Rotating Bodies

Pantelis M. Pechlivanides
Atlantic IKE, Athens 11257, Greece
ppexl@teemail.gr

Abstract

The force experienced by a rotating body that lies in the \mathbf{G} field of another rotating body depends both on the \mathbf{G} field and on its own mass and angular velocity of rotation that affects the magnitude and direction of the exerted force. The force is in general not central and not symmetric. The cases of the non rotating observer and the far away observer are examined for rotation with and without slippage. It is shown that the force may be repulsive or attractive, accelerating or decelerating depending on the angular velocities of the rotations and distance.

1 Introduction

This paper is a continuation of [2] and [3]. In [2] the path of signals emanating from the origin of rotating frames was studied. In [3] based on the findings of [2] the field (called \mathbf{G}) created by a rotating body A that emanates signals was determined for different observers. In this paper we go one step further to examine the force felt by a rotating body B in a \mathbf{G} field created by body A. Body B will in general feel a non central force and will be obliged to move accordingly. The magnitude of the force felt by B depends on the magnitude of the field but also on the ability of body B to receive signals, which is proportional to its mass. However, if body B itself rotates, the force due to the field \mathbf{G} that is experienced by the rotating body B is affected both in magnitude and direction by the mass and rotation angular velocity, and radius of the receiving body because signals approaching the receiving rotating body B are affected by its rotation. This leads us among other things to attractive and repulsive forces. The interaction between two rotating bodies is studied and the strength and direction of forces determined for the cases of the non-rotating and the far away observer and for the sub-cases of rotation with and without slippage. (By slippage we mean exponentially decreasing angular velocity of rotation of the signals with respect to distance.)

This paper is organized as follows: In section 2 we review previous results. In section 3 we find the force between two rotating bodies for rotation with and without slippage and for different observers. In section 4 we visualize the signals' path to understand how repulsive and attractive forces are formed. In section 5 we show how we can generalize to bodies with non parallel axes of rotation. In section 6 we conclude.

2 Review of previous theory

Below is a summary of the results found in [2] and [3], on which this paper stands. We present the transformation of cylindrical coordinates for rotating frames and for different kind of observers and the corresponding \mathbf{G} field that a rotating body at the

origin of the rotating frame (which rotates about its z axis), emitting signals, creates. We have examined the following cases:

A. Rotation without slippage (the angular velocity w of rotation of signals is constant with respect to the distance from the rotating body). Precession of the rotating body is assumed having a very small amplitude and is thus neglected.

A.I Observer O' at the origin but not rotating with the body. (The

transformation holds for $|z| \leq \frac{c}{w}$).

$$\rho' = c \sin \xi I(\xi, t) \quad (1)$$

$$\Theta' = \Theta + vt \quad (2)$$

$$z' = z \quad (3)$$

$$t' = t \quad (4)$$

$$\pi' = \pi \frac{\rho}{\rho'} \frac{c}{\sqrt{c^2 + w^2 \rho^2}} = \pi \frac{t}{I(\xi, t)} \frac{c}{\sqrt{c^2 + w^2 \rho^2}} \quad (5)$$

$$v' = v \quad (6)$$

$$\xi' = \xi \quad (7)$$

where $\rho, \Theta, z, t, \pi, v$ are the radial distance in cylindrical coordinates, the angle of rotation as fraction of a circle (for example degrees), the z direction that coincides with the axis of rotation, time, the number pi, and the frequency of rotation respectively for observer O , who is located at the origin and rotates with the body. And where $\rho', \Theta', z', t', \pi', v'$ are the same quantities for observer O' , who is located at the origin but not rotating with the body. The speed of light is c . The angle of inclination of the signal is the same, ξ , for both observers O and O' .

Further, where,

$$I(\xi, t) = \int_0^t \cos \varphi dt \quad (8)$$

$$\cos \varphi = \sqrt{\frac{1 - w^2 t^2 \cos^2 \xi}{1 + w^2 t^2 \sin^2 \xi}} = \sqrt{\frac{c^2 - w^2 z^2}{c^2 + w^2 \rho^2}} \quad (9)$$

with $\cos \xi = \frac{z}{\sqrt{\rho^2 + z^2}}$, $\sin \xi = \frac{\rho}{\sqrt{\rho^2 + z^2}}$, $\rho = ct \sin \xi$, $z = ct \cos \xi$, φ is the deflection

angle of the field signal from the radial direction and is positive if it is in the same direction as the angular velocity w .

From the above we can find the transformation of the angular velocity w using the formula ($w = 2\pi v$ and $w' = 2\pi' v'$) and the angle of rotation θ measured in radians (using $\theta = 2\pi\Theta$ and $\theta' = 2\pi'\Theta'$) as,

$$\frac{w'}{w} = \frac{\pi'}{\pi} \quad (10)$$

$$\theta' = (\theta + wt) \frac{\pi'}{\pi} \quad (11)$$

The **G** field which in this case we denote as **G'** is given by

$$\mathbf{G}' = -\frac{k_G m'}{(\rho^2 + z^2)} \frac{dV}{dV'} \hat{\mathbf{v}}' = -\frac{k_G m'}{\left(z^2 + \frac{\rho^2 z^2 w^4 U(\xi, t)}{I(\xi, t)(\rho^2 + z^2)} + \frac{\rho^2 \cos \varphi \sqrt{\rho^2 + z^2}}{cI(\xi, t)} \right) \frac{c}{\sqrt{c^2 + w^2 \rho^2}}} \hat{\mathbf{v}}' \quad (12)$$

where $\frac{dV}{dV'}$ is the inverse of the Jacobian of the transformation J' and is given by

$$J' = \left(\cos^2 \xi + \frac{w^4 \cos^2 \xi \sin^2 \xi U(\xi, t)}{I(\xi, t)} + \frac{\rho \sin \xi \cos \varphi}{cI(\xi, t)} \right) \frac{c}{\sqrt{c^2 + w^2 \rho^2}} \quad (13)$$

$$U(\xi, t) = \int_0^t \frac{t^4}{\sqrt{1 - w^2 t^2 \cos^2 \xi} (1 + w^2 t^2 \sin^2 \xi)^{\frac{3}{2}}} dt \quad (14)$$

And $\hat{\mathbf{v}}'$ is the unit vector in the direction of the velocity of the signals of the field.

$$\hat{\mathbf{v}}' = (v'_\rho, v'_\theta, v'_z) = (\sin \xi \cos \varphi, \sin \xi \sin \varphi, \cos \xi) \quad (15)$$

When $z = 0$ the above become,

$$I(\xi, t) \Big|_{z=0} = I\left(\frac{\pi}{2}, t\right) = \int_0^t \frac{dt}{\sqrt{1 + w^2 t^2}} = \frac{1}{w} \operatorname{arcsinh} wt = \frac{1}{w} \operatorname{arcsinh} \frac{w\rho}{c} \quad (16)$$

$$\rho' \Big|_{z=0} = \frac{c}{w} \operatorname{arcsinh} \frac{w\rho}{c} \quad (17)$$

$$J' \Big|_{z=0} = \frac{c\rho w}{(c^2 + w^2 \rho^2) \operatorname{arcsinh} \frac{w\rho}{c}} \quad (18)$$

And

$$\mathbf{G}' \Big|_{z=0} = -\frac{k_G m'}{\rho^2} \underbrace{\frac{(c^2 + w^2 \rho^2) \operatorname{arcsinh} \frac{w\rho}{c}}{c\rho w}}_{\frac{1}{J'}} \hat{\mathbf{v}}' = -\frac{k_G m' (c^2 + w^2 \rho^2) \operatorname{arcsinh} \frac{w\rho}{c}}{\rho^3 c w} \hat{\mathbf{v}}' = -\frac{k_G m' (c^2 + w^2 \rho^2) \rho'}{c^2 \rho^3} \hat{\mathbf{v}}' \quad (19)$$

A.II Observer O'' is the far away observer (outside the cylindrical volume defined by $\rho'' \leq \frac{c}{w}$) for which the transformation below holds.

$$\rho'' = \rho \frac{c}{\sqrt{c^2 + w^2 \rho^2}} = \rho \cos \varphi'' \quad (20)$$

$$\Theta'' = \Theta + vt \quad (21)$$

$$z'' = z \quad (22)$$

$$t'' = t \quad (23)$$

$$\pi'' = \pi \quad (24)$$

$$v'' = v \quad (25)$$

$$\theta'' = \theta + wt \quad (26)$$

The angle φ'' is the angle of deflection of the field signal from the radial direction.

$$\tan \varphi'' = wt(1 + w^2 t^2 \sin^2 \xi) \quad (27)$$

And the angle of inclination of the signal from the z axis is given by

$$\tan \xi'' = \tan \xi \frac{\sqrt{1+w^2 t'^2(1+w^2 t'^2 \sin^2 \xi)^2}}{(1+w^2 t'^2 \sin^2 \xi)^2} = \tan \xi \frac{\sqrt{c^2+w^2(\rho^2+z^2)(c^2+w^2\rho^2)^2}}{(c^2+w^2\rho^2)^2} \quad (28)$$

Where $\tan \xi = \frac{\rho}{z}$

The Jacobian of the transformation is given by

$$\frac{dV}{dV''} = \frac{(c^2 + \rho^2 w^2)^{\frac{3}{2}}}{c^3} \quad (29)$$

The \mathbf{G} field, which in this case we denote as \mathbf{G}'' , is given by

$$\mathbf{G}'' = -\frac{k_G m'}{(\rho^2 + z^2)} \frac{dV}{dV''} \hat{\mathbf{v}}'' = -\frac{k_G m' (c^2 + \rho^2 w^2)^{\frac{3}{2}}}{c^3 (\rho^2 + z^2)} \hat{\mathbf{v}}'' = -\frac{k_G m' c^3}{(c^2 \rho''^2 + (c^2 - w^2 \rho''^2) z^2) \sqrt{c^2 - w^2 \rho''^2}} \hat{\mathbf{v}}'' \quad (30)$$

Where $\hat{\mathbf{v}}''$ is the unit vector in the direction of the velocity of the signals of the field as O'' sees them,

$$\hat{\mathbf{v}}'' = (v''_\rho, v''_\theta, v''_z) = (\sin \xi'' \cos \varphi'', \sin \xi'' \sin \varphi'', \cos \xi'') \quad (31)$$

The field for observer O'' is confined within a cylinder defined by $\rho'' \leq \frac{c}{w}$. As the field reaches the cylindrical surface it rises and forms a barrier and observer O'' lies outside that cylinder. In contrast, O' (case A.I), who lies inside the above cylinder sees the field as extending to infinity in the radial direction but is restricted in the z direction to within $|z| \leq \frac{c}{w}$.

B. Rotation with slippage. (The angular velocity of rotation of signals decreases exponentially with respect to the distance from the rotating body). This case has more meaning physically and we also avoid the unnatural boundaries that appear at $|z| = c/w$ and at $\rho'' = c/w$ in cases **A.I** and **A.II** above. The angular velocity of the signals is given by $w = w_0 e^{-(\lambda\rho + \mu z)} = w_0 e^{-ct(\lambda \sin \xi + \mu \cos \xi)}$ and the frequency of rotation is $v = v_0 e^{-(\lambda\rho + \mu z)} = v_0 e^{-ct(\lambda \sin \xi + \mu \cos \xi)}$ where λ, μ are the slippage parameters in the radial direction and the z direction respectively.

B.I Observer O' at the origin but not rotating.

$$\rho' = c \sin \xi I(\xi, t, \lambda, \mu) \quad (32)$$

$$\Theta' = \Theta + \int_0^t v_0 e^{-ct(\lambda \sin \xi + \mu \cos \xi)} dt = \Theta + \frac{v_0 (1 - e^{-ct(\lambda \sin \xi + \mu \cos \xi)})}{c(\lambda \sin \xi + \mu \cos \xi)} \quad (33)$$

$$z' = z \quad (34)$$

$$t' = t \quad (35)$$

$$\xi' = \xi \quad (36)$$

$$\pi' = \pi \frac{\rho}{\rho'} \frac{c}{\sqrt{c^2 + w_0^2 \rho^2 e^{-2(\lambda\rho + \mu z)}}} \quad (37)$$

where

$$I(\xi, t, \lambda, \mu) = \int_0^t \cos \varphi dt \quad (38)$$

where φ is the angle of deflection of the signal from the radial direction

$$\cos \varphi = \sqrt{\frac{1 - w_0^2 t^2 e^{-2ct(\lambda \sin \xi + \mu \cos \xi)} \cos^2 \xi}{1 + w_0^2 t^2 e^{-2ct(\lambda \sin \xi + \mu \cos \xi)} \sin^2 \xi}} = \sqrt{\frac{c^2 - w_0^2 z^2 e^{-2(\lambda \rho + \mu z)}}{c^2 + w_0^2 \rho^2 e^{-2(\lambda \rho + \mu z)}}} \quad (39)$$

$$\frac{w'}{w} = \frac{\pi'}{\pi} \quad (40)$$

and using (33) with (37) and the fact that $\theta = 2\pi\Theta$, $\theta' = 2\pi\Theta'$, we find the transformation of the rotation angle in radians

$$\theta' = \frac{\pi'}{\pi} \left(\theta + \int_0^t w_0 e^{-ct(\lambda \sin \xi + \mu \cos \xi)} dt \right) = \frac{\pi'}{\pi} \left(\theta + \frac{w_0(1 - e^{-ct(\lambda \sin \xi + \mu \cos \xi)})}{c(\lambda \sin \xi + \mu \cos \xi)} \right) \quad (41)$$

The angle of inclination of the signal to the z axis is ξ ($\tan \xi = \frac{\rho}{z}$) and is the same for both observers O , and O' .

Also assume that $\frac{1}{\mu} \leq \frac{ce}{w_0}$, the condition needed for $\cos \varphi$ to be real for all ξ .

The \mathbf{G} field which in this case we denote as \mathbf{G}' is given by

$$\mathbf{G}' = -\frac{k_G m'}{(\rho^2 + z^2)} \frac{dV'}{dV'} \hat{\mathbf{v}}' = -\frac{k_G m'}{(\rho^2 + z^2)} \frac{1}{J'} \hat{\mathbf{v}}' \quad (42)$$

where $\frac{dV'}{dV}$ is the inverse of the Jacobian J' of the transformation

$$J' = \left(\cos^2 \xi + \frac{\rho \cos \varphi \cos \xi}{cI(\xi, t, \lambda, \mu)} - \frac{\cos \xi U_2(\xi, t)}{I(\xi, t, \lambda, \mu)} \right) \frac{c}{\sqrt{c^2 + w_0^2 \rho^2 e^{-2(\lambda \rho + \mu z)}}} \quad (43)$$

and

$$U_2(\xi, t) = \int_0^t \frac{\partial}{\partial \cos \xi} \left(\sqrt{\frac{1 - w_0^2 t^2 e^{-2ct(\lambda \sin \xi + \mu \cos \xi)} \cos^2 \xi}{1 + w_0^2 t^2 e^{-2ct(\lambda \sin \xi + \mu \cos \xi)} \sin^2 \xi}} \right) dt \quad (44)$$

And

$$\hat{\mathbf{v}}' = (v'_\rho, v'_\theta, v'_z) = (\sin \xi \cos \varphi, \sin \xi \sin \varphi, \cos \xi) \quad (45)$$

B.II Observer O'' (the far away not rotating observer)

$$\rho'' = \rho \frac{c}{\sqrt{c^2 + w_0^2 \rho^2 e^{-2(\lambda \rho + \mu z)}}} \quad (46)$$

$$\Theta'' = \Theta + \int_0^t v_0 e^{-ct(\lambda \sin \xi + \mu \cos \xi)} dt = \Theta + \frac{v_0(1 - e^{-ct(\lambda \sin \xi + \mu \cos \xi)})}{c(\lambda \sin \xi + \mu \cos \xi)} = \Theta + \frac{v_0(1 - e^{-ct\beta})}{c\beta} \quad (47)$$

Where $\beta = \lambda \sin \xi + \mu \cos \xi$

$$z'' = z \quad (48)$$

$$t'' = t \quad (49)$$

$$\pi'' = \pi \quad (50)$$

$$w_0'' = w_0 \quad (51)$$

$$\theta'' = \theta + \int_0^t w_0 e^{-c t (\lambda \sin \xi + \mu \cos \xi)} dt = \theta + \frac{w_0 (1 - e^{-c t \beta})}{c \beta} \quad (52)$$

Where φ'' is the angle of deflection of the field signal from the radial direction and is given by

$$\tan \varphi'' = \frac{w t (1 + w^2 t^2 \sin^2 \xi)}{1 + c (\lambda \sin \xi + \mu \cos \xi) t^3 w^2 \sin^2 \xi} = \frac{w \sqrt{\rho^2 + z^2}}{c} \frac{1 + \frac{w^2 \rho^2}{c^2}}{1 + \frac{w^2 \rho^2 (\lambda \rho + \mu z)}{c^2}} \quad (53)$$

Where $w = w_0 e^{-c t (\lambda \sin \xi + \mu \cos \xi)} = w_0 e^{-c t \beta}$,

The inclination of the path of the signal with respect to the z axis is given by

$$\tan \xi'' = \tan \xi \frac{w t}{\sqrt{1 + w^2 t^2 \sin^2 \xi}} \sqrt{1 + \frac{(1 + c \beta t^3 w^2 \sin^2 \xi)^2}{w^2 t^2 (1 + w^2 t^2 \sin^2 \xi)^2}} = \tan \xi \frac{\sqrt{w^2 t^2 (1 + w^2 t^2 \sin^2 \xi)^2 + (1 + c \beta t^3 w^2 \sin^2 \xi)^2}}{(1 + w^2 t^2 \sin^2 \xi)^{\frac{3}{2}}} \quad (54)$$

Where $\tan \xi = \rho / z$. Equation (54) can also be written as

$$\tan \xi'' = \tan \xi \frac{\sqrt{w^2 \frac{\rho^2 + z^2}{c^2} (1 + w^2 \frac{\rho^2}{c^2})^2 + (1 + (\lambda \rho + \mu z) w^2 \frac{\rho^2}{c^2})^2}}{(1 + w^2 \frac{\rho^2}{c^2})^{\frac{3}{2}}} \quad (55)$$

The \mathbf{G} field, which in this case we denote as \mathbf{G}'' , is given by

$$\mathbf{G}'' = -\frac{k_G m'}{(\rho^2 + z^2)} \frac{dV}{dV''} \hat{\mathbf{v}}'' = -\frac{k_G m'}{(\rho^2 + z^2)} \frac{(c^2 + w_0^2 \rho^2 e^{-2(\lambda \rho + \mu z)})^{\frac{3}{2}}}{c(c^2 + \lambda w_0^2 \rho^3 e^{-2(\lambda \rho + \mu z)})} \hat{\mathbf{v}}'' \quad (56)$$

where $\frac{dV}{dV''}$ is the inverse of the Jacobian of the transformation

with $\hat{\mathbf{v}}'' = (v''_\rho, v''_\theta, v''_z) = (\sin \xi'' \cos \varphi'', \sin \xi'' \sin \varphi'', \cos \xi'')$

The field for O'' forms a “barrier” like the no slippage case when w_0 is very big. By barrier we mean a maximum of the magnitude of the \mathbf{G} field along with a sideways turn of the signals emitted by the rotating body. In this case the radial distances may be shrunk to sub-atomic (*microcosmos*) levels.

3 Force between two rotating bodies with parallel axes of rotation

We have already seen how a rotating point body A creates a \mathbf{G} field around it. What is the force felt by another point body B that is also rotating and vice versa? In what direction does the force point? Is it symmetrical for A and B? These are the questions to be dealt here.

For rotation without slippage, we will examine both the \mathbf{F}' force and \mathbf{F}'' force . For rotation with slippage we will only consider the \mathbf{F}'' force and only briefly comment on \mathbf{F}' .

Let's focus on Case A.I above and then we will turn to cases A.II, B.I and B.II.

First, we need to clarify some matters about observers. Up till now the nearby but not rotating observer O' was placed at the origin, where the rotating point mass is located.

What if another observer O'_2 stationary with respect to O' is placed at some distance from the origin but not far away like observer O'' ? Length measurements denoted by, s below, or angles like θ , will not be affected because he is stationary with respect to O' . However, O'_2 is subject to the gravity field of body A, while O' , being at the center of the rotating body A, is not. This will affect the clock of O'_2 , which will run slower. (see for example Møller [1]). If we denote by t'_{NG} the time of the No Gravity (NG) observer (O') and by t'_2 the time of O'_2 then the rate of clock will be altered by

the factor $\frac{dt'_2}{dt'_{NG}}$. Other quantities of interest such as angular velocity, w , velocity, v ,

will be altered as follows (the subscript 2 refers to observer O'_2):

$$w'_2 = \frac{d\theta'_2}{dt'_2} = \frac{d\theta'_2}{dt'_{NG}} \frac{dt'_{NG}}{dt'_2} \text{ but } \theta'_2 = \theta'_{NG} \text{ because angles are spatial measurements, thus}$$

$$w'_2 = \frac{d\theta'_{NG}}{dt'_{NG}} \frac{dt'_{NG}}{dt'_2} = w'_{NG} \frac{dt'_{NG}}{dt'_2}$$

Similarly, for velocity, $v'_2 = \frac{ds'_2}{dt'_2} = \frac{ds'_{NG}}{dt'_{NG}} \frac{dt'_{NG}}{dt'_2} = v'_{NG} \frac{dt'_{NG}}{dt'_2}$. This also holds when $v = c$ the

speed of light. Thus, the ratio $\frac{w}{c}$, or $\frac{v}{c}$ remain invariant between the two observers.

Consequently the angle of deflection φ given by (9), will remain invariant since it only depends on w/c

Further , $\frac{d\rho'_2}{dt'_2} = c'_2 \sin \xi \cos \varphi = c'_{NG} \frac{dt'_{NG}}{dt'_2} \sin \xi \cos \varphi = \frac{d\rho'_{NG}}{dt'_2}$. It follows that ρ'_2 and ρ'_{NG}

differ by a constant. But at $t'_2 = 0$ they are equal to each other. Therefore, $\rho'_2 = \rho'_{NG}$ and thus ρ' is invariant as expected since it is a spatial measurement.

On account of (5) π' is also invariant between observers O'_2 and O' because ρ' and $\frac{w}{c}$ are invariant

However, $I(\xi, t)$ is not invariant and therefore, for case A.I, the magnitude of the field \mathbf{G} will differ but not its direction, which remains invariant.

Repeating the above exercise we see that the findings above hold for case B.I, where we have the nearby observers but rotation with slippage. Therefore, in the following we will not require that observer O' is necessarily located at the origin of the axis at A.

Following the same reasoning for cases A.II and B.II, for the far away observer O'' , we find that all the above quantities plus the magnitude of the \mathbf{G} field remains invariant, whether the observer is under gravity or not.

3.1 The \mathbf{F}' force for rotation without slippage (observer O' , case A.I)

First we need some notation. Body A has rotating mass m'_A as seen by observer O' (m'_A is calculated in [3] from the stationary mass m_A), angular velocity of rotation w_A and body B has m'_B (calculated the same way as m'_A) and w_B respectively. Also let the distance between the bodies A, B as observed by observer O' (who stands within the \mathbf{G} fields created by A and B) be $\rho'_{AB}(w_A, w_B)$ to remind us that it is a function of w_A and w_B , and let for the moment the planes of rotation of the two bodies be the same so that their distance in the z direction is zero ($z_{AB} = 0$) for simplicity. Later we relax this restriction. Let also A and B be within each other's reach of the respective \mathbf{G} field. Suppose for the moment that $w_B = 0$. Then the signals traveling from A will reach B with an angle of deflection with respect to the line joining the two bodies as seen by O' ,

equal to φ_A . Recall that from (9) $\cos \varphi_A \Big|_{z=0} = \frac{c}{\sqrt{c^2 + w_A^2 \rho'_{AB}(0,0)^2}}$ or

$\tan \varphi_A \Big|_{z=0} = \frac{w_A \rho'_{AB}(0,0)}{c}$, where $\rho'_{AB}(0,0)$ is the length of the path of the signal that travels from A to B, which is the same as the straight line from A to B, when there is no rotation i.e. when $w_A = w_B = 0$.

The force \mathbf{F}'_{AB} that the non rotating body B will feel as seen by observer O' and which is due to the field created by A, will be defined as the product of the \mathbf{G}'_{AB} field (the field due to A as it is felt by B) with the mass of body B. This is justified by the idea that the number of signals of the field that body B intercepts, will be proportional to its observed mass, m'_B . This can be written as

$$\mathbf{F}'_{AB} = \mathbf{G}'_{AB} m'_B \quad (57)$$

Now we will let body B rotate (along with the space around it) so that $w_B \neq 0$. To visualize the situation look at Figure 1. The case of no rotation is shown in Figure 1 (a).

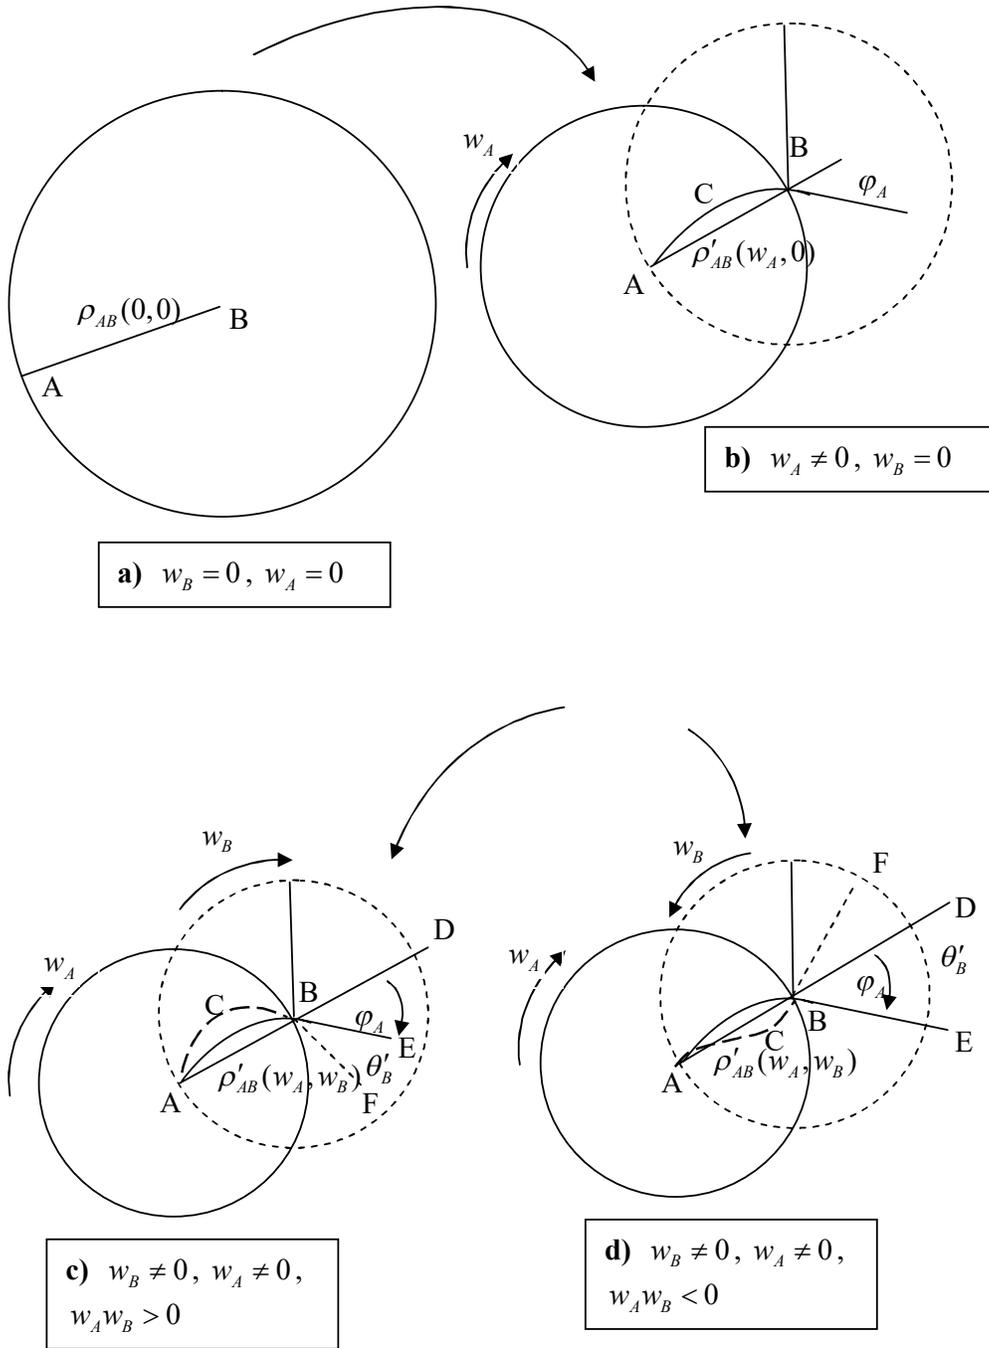


Figure 1 (a) Neither body rotates . The straight line distance which coincides with the path of the signal is AB and its length is $\rho_{AB}(0,0)$ (b) Only A rotates. The curved line ACB indicates the path of a signal from A towards B through C as seen by observer O' . The length of the path ACB is again $\rho_{AB}(0,0)$ but the straight line for observer O' is shorter: $\rho'_{AB}(w_A, 0) = AB$ (c) A and B rotate in the same direction (d) A and B rotate in opposite directions. The dashed line from ACB in cases (c) and (d) shows the path of the signal from A to B (whose length is

again $\rho_{AB}(0,0)$) as seen by observer O' . The straight line from A to B for that observer is $\rho'_{AB}(w_A, w_B) = AB$

Look at Figure 1(b), where disc A is rotating and disc B is stationary. According to an observer O_B at B, the path of the signal follows the curved path ACB . Suppose now that body B and the frame, where it stands at the origin, starts rotating with angular velocity w_B , and let O_B rotate with B, while a second observer O'_B on top of O_B does not rotate with B. Observer O_B will continue to see the signal follow the same curved path ACB . But O'_B will see the path of the signal change as the result of the addition of the two rotations of space (of A and B). It will be more curved if B rotates in the same direction as A, and less curved if it rotates in the opposite direction. For the more curved case see the dashed path ACB from A to B in Figure 1(c). For the less curved case, when it rotates in the opposite direction of w_A see the dashed path ACB from A to B in Figure 1(d). In fact, O'_B , will see the angle of deflection $\varphi_A (= \angle DBE)$ at point B

increase by $\theta'_B = w'_B t_{AB}$, where $t_{AB} = \frac{\rho'_{AB}(0,0)}{c}$. Note that O'_B does not necessarily have

to be located at B. He is a type O' observer as we explained above.

So the final deflection will be $\varphi_A + \theta'_B$. But in fact θ'_B is measured at B, which is zero distance from B, and therefore, there is no effect from the rotation of B. Thus $\theta'_B = \theta_B$ and $w'_B = w_B$. (See Figure 1 (c) $\angle EBF = \theta'_B$ and $\varphi_A + \theta'_B = \angle DBF$, where φ_A is given

by $\tan \varphi_A = \frac{w_A \rho'_{AB}(0,0)}{c}$). In the following we may use θ_B instead of θ'_B since they are

equal. If B is rotating in the opposite direction, the final deflection angle $\varphi_A + \theta'_B$ will be the result of subtraction (since θ'_B is negative) and will look as in Figure 1(d) where

$\varphi_A = \angle DBE$, $\theta'_B = \angle EBF$ and $\varphi_A + \theta'_B = \angle FBD$. Recall that observer O' lies within the extend of both G fields, that of A and that of B, which for the outside far away observer

O'' extend up to the cylinder of radius $\frac{c}{w_A}$ around the axis of rotation of body A and the

cylinder of radius $\frac{c}{w_B}$ around the axis of rotation of body B.

The straight line distance between A and B according to observer O' is $\rho'_{AB}(w_A, w_B)$.

In order to relate $\rho'_{AB}(w_A, w_B)$ to $\rho'_{AB}(0,0)$ we must imagine that O_B has a straight transparent rod of length $\rho'_{AB}(w_A, 0)$ whose one end he holds and it points in the radial direction from B, through which a signal is send, whenever its free end passes from A. Then O' will see a curve from A to B being traveled by the signal and the radius being contracted to $\rho'_{AB}(w_A, w_B)$ according to (1) at $z = 0$. So in effect we apply (1) at $z = 0$ twice:

$$\frac{w_B \rho'_{AB}(w_A, 0)}{c} = \sinh \frac{w_B \rho'_{AB}(w_A, w_B)}{c} \quad (58)$$

$$\frac{w_A \rho'_{AB}(0,0)}{c} = \sinh \frac{w_A \rho'_{AB}(w_A, 0)}{c} \quad (59)$$

From which we arrive at

$$\rho'_{AB}(0,0) = \frac{c}{w_A} \sinh \left[\frac{w_A}{w_B} \sinh \frac{w_B \rho'_{AB}(w_A, w_B)}{c} \right] \quad (60)$$

We may remark here that when $-2 \leq x \leq 2$ then $\sinh x \approx x$ and therefore, when

$$-2 \leq \frac{w_B \rho_{AB}(w_A, w_B)}{c} \leq 2 \quad \text{and} \quad -2 \leq \frac{w_A \rho_{AB}(w_A, w_B)}{c} \leq 2 \quad \text{then} \quad \rho'_{AB}(0,0) \approx \rho'_{AB}(w_A, w_B).$$

Observe that the subscript AB indicates the direction of the signal from body A to body B. $\rho'_{AB}(w_A, w_B)$ is not symmetric in the direction of the signal. It is also not symmetric in w_A, w_B . But it is symmetric if both A,B and w_A, w_B are interchanged. This means that since observer O' will see the same distance, ($\rho'_{AB}(w_A, w_B) = \rho'_{BA}(w_A, w_B)$) the corresponding distances that the light signals travel will be different ie., $\rho'_{AB}(0,0) \neq \rho'_{BA}(0,0)$. This, in turn, means that a signal traveling from A to B will travel a different distance ($\rho'_{AB}(0,0)$) than the signal traveling from B to A ($\rho'_{BA}(0,0)$) as observer O' sees them.

By symmetrical arguments the signals that arrive to A from B will have an angle of deflection equal to $\varphi_B + \theta'_A$ where $\theta'_A = w'_A t_{BA}$, $\tan \varphi_B = \frac{w_B \rho'_{BA}(0,0)}{c}$, and $t_{BA} = \frac{\rho'_{BA}(0,0)}{c}$

By the same arguments as for observers at B, $\theta'_A = \theta_A$, $w'_B = w_B$ and hence we will not use the prime. The magnitude of the force is again given by (57) but the direction is changed. Thus, for $w_b = 0$,

$$|\mathbf{F}'_{BA}| = |\mathbf{G}'_{BA}| m'_A \quad (61)$$

where $|\mathbf{G}'_{BA}|$ is given by (19), while the direction is given by the deflection from the straight line $\rho'_{BA}(w_B, w_A)$ by the total deflection $\varphi_B + \theta_A$.

We are ready now to relax the condition that $z_{AB} = 0$

For observer O' the field created by A is limited by $|z| < \frac{c}{w_A}$

When The force \mathbf{F}'_{AB} perceived by body B that is due to the \mathbf{G}'_{AB} field created by body A is given by (61) and \mathbf{G}'_{AB} is given by (12) and combining them,

$$\mathbf{F}'_{AB} = - \frac{k_G m'_A m'_B}{\left(z_{AB}^2 + \frac{\rho'^2_{AB}(0,0) z_{AB}^2 w_A^4 U(w_A, \xi_{AB}, t_{AB})}{I(w_A, \xi_{AB}, t_{AB}) (\rho'^2_{AB}(0,0) + z_{AB}^2)} + \frac{\rho'^2_{AB}(0,0) \cos \varphi_A \sqrt{\rho'^2_{AB}(0,0) + z_{AB}^2}}{c I(w_A, \xi_{AB}, t_{AB})} \right) \sqrt{c^2 + w_A^2 \rho'^2_{AB}(0,0)}} \hat{\mathbf{v}}'_{AB} \quad (62)$$

Where we have denoted $I(\xi_{AB}, t_{AB})$ as $I(w_A, \xi_{AB}, t_{AB})$ and similarly for $U(w_A, \xi_{AB}, t_{AB})$ to remind us that it also depends on w_A . Also in (62) for economy of space we denoted

$\xi_{AB}(0,0) = \xi_{AB}$ and $t_{AB}(0,0) = t_{AB}$. The magnitude of the field $|\mathbf{G}'_{AB}|$ given by (12) remains unaffected by the rotation of B, because it gives the magnitude of the field at point B, where the rotation of B has no effect. It only affects the number of signals per unit volume at positive distance from B (not at zero distance from B). This is why (12) still holds. Only the direction $\hat{\mathbf{v}}'_{AB}$ of the signals of the field as they fall on body B changes because the angle of deflection changes as we will explain below. The curved distance $\rho'_{AB}(0,0)$ is the projection on the plane of rotation or horizontal plane (i.e. the plane that is perpendicular to the axes of rotation of the bodies A, B) of the path that the field signal follows to go from A to B, which is curved and possibly winding around A and around B. The total distance that the signals travel from A to B is $\sqrt{\rho'^2_{AB}(0,0) + z_{AB}^2}$, while $\xi_{AB}(0,0)$ is the angle of inclination, which the signals from A make with the z axis ($\tan \xi_{AB}(0,0) = \frac{\rho'_{AB}(0,0)}{z_{AB}}$).

Also the angle of deflection of the signals arriving at B will increase from φ_A to $\varphi_A + \theta_B$, where from (9) we know that $\tan \varphi_A = \frac{w_A \rho'_{AB}(0,0)}{\sin \xi_{AB}(0,0) \sqrt{c^2 - w_A^2 z_{AB}^2}}$, while

$$\theta'_B = w'_B t_{AB}(0,0) = \theta_B = w_B t_{AB} \quad (63)$$

and

$$t_{AB}(0,0) = \frac{\sqrt{\rho'^2_{AB}(0,0) + z_{AB}^2}}{c} = \frac{z_{AB}}{c \cos \xi_{AB}(0,0)} \quad (64)$$

The direction of the signals of the field is represented by the unit vector $\hat{\mathbf{v}}'_{AB}$, which (when projected on the horizontal plane) gives the total angle of deflection $\varphi_A + \theta_B$ of the signals from the projection of the straight line between A and B on the horizontal plane. Specifically,

$$\hat{\mathbf{v}}'_{AB} = (\sin \xi_{AB}(0,0) \cos(\varphi_A + \theta_B), \sin \xi_{AB}(0,0) \sin(\varphi_A + \theta_B), \cos \xi_{AB}(0,0)) \quad (65)$$

for the cylindrical components (ρ, θ, z) .

Further, to determine $\rho'_{AB}(0,0)$ from the observed $\rho'_{AB}(w_A, w_B)$, we apply the same reasoning as for the two dimensional case ($z_{AB} = 0$) that we used above and apply the transformation (1) twice,

$$\rho'_{AB}(w_A, 0) = c \sin \xi_{AB}(0,0) I(w_A, \xi_{AB}(0,0), t_{AB}(0,0)) \quad (66)$$

$$\rho'_{AB}(w_A, w_B) = c \sin \xi_{AB}(w_A, 0) I(w_B, \xi_{AB}(w_A, 0), t_{AB}(0,0)) \quad (67)$$

$$\tan \xi_{AB}(0,0) = \frac{\rho'_{AB}(0,0)}{z_{AB}} \quad (68)$$

$$\tan \xi_{AB}(w_A, 0) = \frac{\rho'_{AB}(w_A, 0)}{z_{AB}} \quad (69)$$

$$t_{AB}(0,0) = \frac{\sqrt{\rho'^2_{AB}(0,0) + z_{AB}^2}}{c} \quad (70)$$

Substituting (70) and (69) in (67) we have an equation relating $\rho'_{AB}(w_A, w_B)$ to $\rho'_{AB}(w_A, 0)$. While substituting (70) and (68) in (66) we have an equation relating $\rho'_{AB}(w_A, 0)$ to $\rho'_{AB}(0, 0)$. Thus from $\rho'_{AB}(w_A, w_B)$ we may find $\rho'_{AB}(w_A, 0)$ and then $\rho'_{AB}(0, 0)$.

Finally, from (1), (5) and (10)

$$\frac{w'_B \rho'_{AB}(w_A, w_B)}{w_B \rho'_{AB}(w_A, 0)} = \frac{c}{\sqrt{c^2 + w_B^2 \rho'_{AB}(w_A, 0)^2}} \quad (71)$$

From which w'_B may be determined and then θ'_B found using (63). But in our case the latter is not needed since we measure θ'_B at zero distance from B and hence as we said $\theta'_B = \theta_B$ and $w'_B = w_B$.

We may observe that the force in (62) is asymmetric in A and B both in direction and magnitude.

A generalization: when Body B is not a point mass: In the discussion above we said that the magnitude of $|\mathbf{G}'_{AB}|$ is unaffected by the rotation of B at distance 0 from B. This assumes that we have a point mass. In reality B will have a radius r_B and there will be rotation and contraction of space at distance r_B thus the magnitude of $|\mathbf{G}'_{AB}|$ and hence \mathbf{F}'_{AB} will be affected by the rotation of B. Figure 2 and some notation will help.

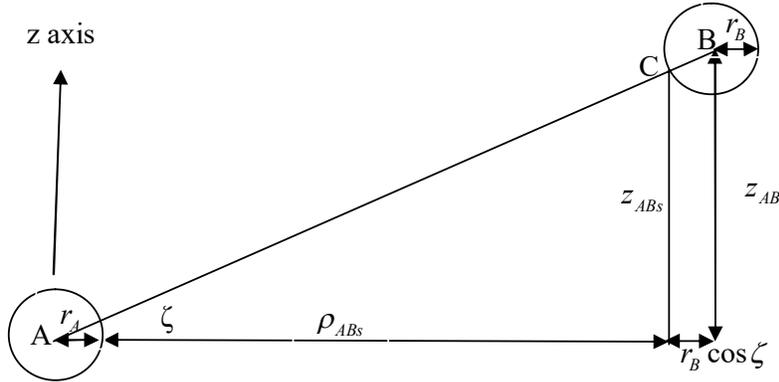


Figure 2 Two bodies A and B rotating along their z axis having radiuses r_A and r_B respectively. The graph shows the situation when there is no rotation.

Body A has static radius r_A and rotates with angular velocity w_A around its z axis. Body B with parallel z axis rotates with w_B and has static radius r_B . When there is no rotation the surface to surface radial distance between them is ρ_{ABs} and the center to

center radial distance is $\rho_{AB} = \rho_{ABs} + r_A + r_B \cos \zeta$. Note that the correct notation is $\rho_{AB}(0,0)$ and $\rho_{ABs}(0,0)$ but for economy we write ρ_{AB} and ρ_{ABs} . The z distance from center to center is z_{AB} . We are interested in the magnitude of the force due to A that acts on B at point C. We know that $AC^2 = (\rho_{ABs} + r_A)^2 + z_{ABs}^2$,

$$z_{ABs} = z_{AB} \frac{\rho_{ABs} + r_A}{\rho_{ABs} + r_A + r_B \cos \zeta} = z_{AB} - r_B \sin \zeta, \quad \sin \zeta = \frac{z_{AB}}{AB}$$

The magnitude of the Newtonian force that acts on B due to A is then multiplied by the inverse of the two Jacobians one for the transformation due to the rotation of A and one for the rotation of B calculated at point C and, therefore, the general form will be

$$\mathbf{F}_{AB}^* = -k_G \frac{m_A^* m_B^*}{\rho_{AB}^2 + z_{AB}^2} \left[\frac{dV}{dV^*} \right]_{\substack{w=w_A \\ \rho=\rho_{ABs}+r_A \\ z=z_{ABs}=z_{AB}-r_B \sin \zeta}} \left[\frac{dV}{dV^*} \right]_{\substack{w=w_B \\ \rho=r_B \cos \zeta \\ z=-(z_{AB}-z_{ABs})=r_B \sin \zeta}} \hat{\mathbf{v}}_{AB}^* \quad (72)$$

Where * indicates the transformation according to the cases A.I, A.II, B.I, B.II exposed above. $\frac{1}{J_A^*} = \left[\frac{dV}{dV^*} \right]_{\substack{w=w_A \\ \rho=\rho_{ABs}+r_A \\ z=z_{ABs}}}$ is the inverse of the Jacobian J_A^* of the transformation that is

due to the rotation of A with $w = w_A$ and is evaluated with origin at A and at distance

from that origin $\rho = \rho_{ABs} + r_A$, and $\frac{1}{J_B^*} = \left[\frac{dV}{dV^*} \right]_{\substack{w=w_B \\ \rho=r_B \cos \zeta \\ z=-(z_{AB}-z_{ABs})}}$ is the inverse of the Jacobian J_B^* of

the transformation due to the rotation of B and is evaluated with origin at B with $w = w_B$ and at distance from that origin $\rho = r_B \cos \zeta$, while the direction of the unit vector $\hat{\mathbf{v}}_{AB}^*$ is

given by the total deflection and the inclination angle ξ^* . Thus (72) can also take the form

$$\mathbf{F}_{AB}^* = -k_G \frac{m_A^* m_B^*}{\rho_{AB}^2 + z_{AB}^2} \frac{1}{J_A^*} \frac{1}{J_B^*} \hat{\mathbf{v}}_{AB}^* \quad (73)$$

To apply (73) to the present case A.I of this section we need to evaluate (13) which is the Jacobian of the transformation or $\frac{dV}{dV'}$ for the two distances as required and replace the two Jacobians in (72). The math for this case is rather cumbersome. However, when $z_{AB} = 0$ the force simplifies to

$$\mathbf{F}_{AB}' = -k_G \frac{m_A' m_B'}{\rho_{AB}^2} \left[\frac{dV}{dV'} \right]_{\substack{w=w_A \\ \rho=\rho_{AB}-r_B \\ z=0}} \left[\frac{dV}{dV'} \right]_{\substack{w=w_B \\ \rho=r_B \\ z=0}} \hat{\mathbf{v}}_{AB}' \quad (74)$$

Where from (18)

$$\left[\frac{dV}{dV'} \right]_{z=0} = \frac{(c^2 + w^2 \rho^2) \operatorname{arcsinh} \frac{w\rho}{c}}{c\rho w} \quad (75)$$

3.2 The F'' force for rotation without slippage (far away observer O'' case, A.II)

Observer O'' lies outside both G'' cylinders of the bodies A, B. That is, he is beyond the cylinder of radius $\frac{c}{w_A}$ with axis of rotation that of body A and cylinder with radius

$\frac{c}{w_B}$ with axis of rotation that of body B. But bodies A and B lie within each other's G'' cylinder. The angle of deflection that is due only to the rotation of A is by (27) given by

$$\tan \varphi_A'' = \frac{w_A \sqrt{\rho_{AB}''^2(0,0) + z_{AB}^2}}{\underbrace{c}_{w_A t_{AB}}} \left(1 + \frac{w_A^2 \rho_{AB}''^2(0,0) \sin^2 \xi_{AB}''(0,0)}{c^2} \right). \quad \text{This angle of deflection}$$

will be increased because of the rotation of B by $\theta_B'' = w_B t_{AB} = \theta_B$ where

$$t_{AB} = \frac{\sqrt{\rho_{AB}''^2(0,0) + z_{AB}^2}}{c} \quad \text{and the total deflection will be } \varphi_A'' + \theta_B''. \quad \text{Observe that } \theta_B'' = \theta_B$$

and that we may, therefore, omit the double prime for θ'' below. The angle of inclination of the signal velocity vector from the z axis for observer O is

$$\tan \xi_{AB}''(0,0) = \tan \xi_{AB}''(0,0) = \frac{\rho_{AB}''(0,0)}{z_{AB}}.$$

The radial distance ρ_{AB}'' is given by (20) and applying it twice we have,

$$\rho_{AB}''(w_A, w_B) = \rho_{AB}''(w_A, 0) \frac{c}{\sqrt{c^2 + w_B^2 \rho_{AB}''^2(w_A, 0)}} \quad (76)$$

$$\rho_{AB}''(w_A, 0) = \rho_{AB}''(0,0) \frac{c}{\sqrt{c^2 + w_A^2 \rho_{AB}''^2(0,0)}} \quad (77)$$

Substitute (77) in (76) to find

$$\rho_{AB}''(w_A, w_B) = \frac{c \rho_{AB}''(0,0)}{\sqrt{c^2 + (w_A^2 + w_B^2) \rho_{AB}''^2(0,0)}} \quad (78)$$

which is symmetric in A, B. From the observed radial distance between A, B, which is represented by $\rho_{AB}''(w_A, w_B)$ one can use (78) to find the radial component (the projection on the horizontal plane) of the length of the path of the signal from A to B which is given by $\rho_{AB}''(0,0)$. In fact we may solve to find,

$$\rho_{AB}''(0,0) = \frac{c \rho_{AB}''(w_A, w_B)}{\sqrt{c^2 - (w_A^2 + w_B^2) \rho_{AB}''^2(w_A, w_B)}} \quad (79)$$

This value may be used to determine t_{AB} , $\xi_{AB}''(0,0)$ and $\tan \varphi_A''$ which is given by (27)

$$\tan \varphi_A'' = w_A t_{AB} (1 + w_A^2 t_{AB}^2 \sin^2 \xi_{AB}''(0,0)) \quad (80)$$

While from (28)

$$\tan \xi_{AB}''(w_A, 0) = \tan \xi_{AB}''(0,0) \frac{\sqrt{1 + w_A^2 t_{AB}^2 (1 + w_A^2 t_{AB}^2 \sin^2 \xi_{AB}''(0,0))^2}}{(1 + w_A^2 t_{AB}^2 \sin^2 \xi_{AB}''(0,0))^{\frac{3}{2}}} \quad (81)$$

Using (73) the force exerted on B is given by,

$$\mathbf{F}_{AB}'' = -\frac{k_G m'_A m'_B}{(\rho_{AB}''(0,0) + z_{AB}^2)} \left[\frac{(c^2 + w_A^2 \rho^2)^{\frac{3}{2}}}{c^3} \right]_{z=z_{AB} \frac{\rho_{AB}''(0,0) - r_B \cos \zeta}{\rho_{AB}''(0,0)}}^{\rho = \rho_{AB}''(0,0) - r_B \cos \zeta} \left[\frac{(c^2 + w_B^2 \rho^2)^{\frac{3}{2}}}{c^3} \right]_{z=-z_{AB} \frac{r_B \cos \zeta}{\rho_{AB}''(0,0)}}^{\rho = r_B \cos \zeta} \hat{\mathbf{v}}_{AB}'' \quad (82)$$

Or

$$\mathbf{F}_{AB}'' = -\frac{k_G m'_A m'_B}{(\rho_{AB}''(0,0) + z_{AB}^2)} \frac{(c^2 + w_A^2 (\rho_{AB}''(0,0) - r_B \cos \zeta)^2)^{\frac{3}{2}} (c^2 + w_B^2 r_B^2 \cos^2 \zeta)^{\frac{3}{2}}}{c^3} \hat{\mathbf{v}}_{AB}'' \quad (83)$$

This can also be expressed in terms of $\rho_{AB}''(w_A, w_B)$ using (79). It is interesting to

observe in (82) that $\rho'' = \rho \frac{c}{(c^2 + w_A^2 \rho^2)^{\frac{1}{2}}}$ or that $\rho = \rho'' \frac{1}{\sqrt{1 - \frac{w^2 \rho''^2}{c^2}}}$ using the usual

notation of special relativity for observer O'' , $\gamma = \frac{1}{\sqrt{1 - \frac{w^2 \rho''^2}{c^2}}} = \frac{(c^2 + w^2 \rho^2)^{\frac{1}{2}}}{c}$ and thus

$\rho'' = \frac{\rho}{\gamma}$. It follows that we may write (83) as

$$\mathbf{F}_{AB}'' = -\frac{k_G m'_A m'_B}{(\rho_{AB}''(0,0) + z_{AB}^2)} \gamma_A^3 \gamma_B^3 \hat{\mathbf{v}}_{AB}'' \quad (84)$$

Where γ_A and γ_B are equal to γ evaluated with origin A and B respectively as we did above in (82).

The unit vector of the direction of the signals of the field is given by

$$\hat{\mathbf{v}}_{AB}'' = (\sin \xi_{AB}''(w_A, w_B) \cos(\varphi_A'' + \theta_B), \sin \xi_{AB}''(w_A, w_B) \sin(\varphi_A'' + \theta_B), \cos \xi_{AB}''(w_A, w_B)) \quad (85)$$

The unprimed quantities refer to observer O . As we explained in the previous section the ratio w/c , remains invariant under the presence of a gravitational field and the same is true for the quantities wt , and ct . Thus, for the far away observer the angles φ_A'' , θ_B'' , ξ_{AB}'' and the distance ρ_{AB}'' , will not depend on whether he or the other stationary observers at A or B or some other location, are under the influence of a gravity field and in particular of the field created by the other the two rotating bodies.

Still we need to show how $\tan \xi_{AB}''(w_A, w_B)$ is determined so that the unit vector in (85) is well defined. Imagine a light signal starting from B is send through a transparent rod that has an angle $\xi_{BA}''(w_A, w_B)$ to the z axis and rotates with B having its one end fixed at B. After describing a curved path, the signal arrives at A when both B and A are rotating. We need to satisfy the following :

From (78)

$$\rho_{AB}''(w_A, w_B) = \frac{c \rho_{AB}''(0,0)}{\sqrt{c^2 + (w_A^2 + w_B^2) \rho_{AB}''(0,0)^2}} = \frac{ct_{AB} \sin \xi''(0,0)}{\sqrt{1 + (w_A^2 + w_B^2) t_{AB}^2 \sin^2 \xi''(0,0)}} \quad (86)$$

Where $\rho_{AB}''(w_A, w_B) = \rho_{BA}''(w_A, w_B)$, $\rho_{AB}''(0,0) = \rho_{BA}''(0,0)$,

$$t_{AB} = t_{BA} = \frac{\sqrt{\rho_{AB}''(0,0)^2 + z_{AB}^2}}{c}$$

Letting $v_{C,BA}$ be the speed of the signal on the curved path from B to A we must have the speed in the z direction be unaffected by rotations :

$$v_{C,BA} \cos \xi''_{BA}(w_A, w_B) = c \cos \xi''_{BA}(0, 0) \quad (87)$$

Where $\cos \xi''_{BA}(0, 0) = \frac{z}{\sqrt{\rho''_{AB}(0, 0)^2 + z^2}} = \cos \xi''_{AB}(0, 0)$

The tangential speed of the signal must equal $w_B \rho''_{BA}(w_A, w_B)$:

$$v_{C,BA} \sin \xi''_{BA}(w_A, w_B) \sin \varphi''_{BA} = w_B \rho''_{BA}(w_A, w_B) \quad (88)$$

The radial speed of the signal must equal to the rate of increase of the radial distance:

$$\frac{d\rho''_{BA}(w_A, w_B)}{dt} = v_{C,BA} \sin \xi''_{BA}(w_A, w_B) \cos \varphi''_{BA} \quad (89)$$

Where φ''_{BA} is the angle of deflection of the signal from the radial from B to A projected on the plain at $z = 0$.

Solving the above we start with (86) and we find

$$\frac{d\rho''_{BA}(w_A, w_B)}{dt} = \frac{c \sin \xi''_{BA}(0, 0)}{(1 + (w_A^2 + w_B^2)t_{BA}^2 \sin^2 \xi''_{BA}(0, 0))^{\frac{3}{2}}} \quad (90)$$

Using this and dividing (88) by (89) and applying (86), we find

$$\tan \varphi''_{BA} = \frac{w_B \rho''_{BA}(w_A, w_B)}{d\rho''_{BA}(w_A, w_B)} = w_B t_{BA} (1 + (w_A^2 + w_B^2)t_{BA}^2 \sin^2 \xi''_{BA}(0, 0)) \quad (91)$$

Dividing (88) by (87) we find

$$\tan \xi''_{BA}(w_A, w_B) = \frac{w_B \rho''_{BA}(w_A, w_B)}{c \cos \xi''_{BA}(0, 0) \sin \varphi''_{BA}} \quad (92)$$

And using (86) and (91) we obtain,

$$\tan \xi''_{BA}(w_A, w_B) = \frac{w_B t_{BA} \sin \xi''_{BA}(0, 0)}{c \cos \xi''_{BA}(0, 0) \sqrt{1 + (w_A^2 + w_B^2)t_{BA}^2 \sin^2 \xi''_{BA}(0, 0)}} \sqrt{1 + \cot^2 \varphi''_{BA}} \quad (93)$$

Or

$$\tan \xi''_{BA}(w_A, w_B) = \tan \xi''_{BA}(0, 0) \frac{\sqrt{1 + w_B^2 t_{BA}^2 (1 + (w_A^2 + w_B^2)t_{BA}^2 \sin^2 \xi''_{BA}(0, 0))^2}}{(1 + (w_A^2 + w_B^2)t_{BA}^2 \sin^2 \xi''_{BA}(0, 0))^{\frac{3}{2}}} \quad (94)$$

Finally from (87)

$$v_{C,BA} = \frac{c \cos \xi''_{BA}(0, 0)}{\cos \xi''_{BA}(w_A, w_B)} = c \cos \xi''_{BA}(0, 0) \sqrt{1 + \tan^2 \xi''_{BA}(0, 0) \frac{(1 + w_B^2 t_{BA}^2 (1 + (w_A^2 + w_B^2)t_{BA}^2 \sin^2 \xi''_{BA}(0, 0))^2)}{(1 + (w_A^2 + w_B^2)t_{BA}^2 \sin^2 \xi''_{BA}(0, 0))^3}} \quad (95)$$

From (94) we can find for a signal that travels the opposite way, from A to B:

$$\tan \xi''_{AB}(w_A, w_B) = \tan \xi''_{AB}(0, 0) \frac{\sqrt{1 + w_A^2 t_{AB}^2 (1 + (w_A^2 + w_B^2)t_{AB}^2 \sin^2 \xi''_{AB}(0, 0))^2}}{(1 + (w_A^2 + w_B^2)t_{AB}^2 \sin^2 \xi''_{AB}(0, 0))^{\frac{3}{2}}} \quad (96)$$

by changing the subscript BA to AB since $\xi''_{AB}(0, 0) = \xi''_{BA}(0, 0)$, $t_{AB} = t_{BA}$. Thus, $\xi''_{AB}(w_A, w_B)$ is found and the unit vector in (85) is determined as required.

3.3 The \mathbf{F}' force for rotation with slippage (observer O' , case B.I)

In this case we should follow the same steps as for case A.I and after we determine,

$$\rho'_{AB}(0,0), \text{ we calculate } \theta_B = \int_0^{t_{AB}} w_{B0} e^{-ct\beta_{AB}} dt = \frac{w_{B0}}{c\beta_{AB}} (1 - e^{-ct\beta_{AB}}), \text{ where}$$

$$t_{AB} = \frac{\sqrt{\rho_{AB}(0,0)^2 + z_{AB}^2}}{c}, \quad \beta_{AB} = \lambda \sin \xi_{AB}(0,0) + \mu \cos \xi_{AB}(0,0)$$

However, calculations are more difficult because of the exponential in the angular velocity.

3.4 The \mathbf{F}'' force for rotation with slippage (observer O'' , case B.II)

From (46), and setting $w_A = w_{A0} e^{-ct\beta_{AB}}$, $w_B = w_{B0} e^{-ct\beta_{AB}}$, where

$$\beta_{AB} = \lambda \sin \xi''_{AB}(0,0) + \mu \cos \xi''_{AB}(0,0) \text{ and } t''_{AB} = t_{AB} = \frac{\sqrt{\rho''_{AB}(0,0)^2 + z_{AB}^2}}{c} \text{ we have,}$$

$$\rho''_{AB}(w_A, 0) = \rho''_{AB}(0,0) \frac{c}{\sqrt{c^2 + w_{A0}^2 \rho''_{AB}(0,0)^2 e^{-2(\lambda \rho''_{AB}(0,0) + \mu z_{AB})}}} \quad (97)$$

$$\rho''_{AB}(w_A, w_B) = \rho''_{AB}(w_A, 0) \frac{c}{\sqrt{c^2 + w_{B0}^2 \rho''_{AB}(w_A, 0)^2 e^{-2(\lambda \rho''_{AB}(0,0) + \mu z_{AB})}}} \quad (98)$$

From which $\rho''_{AB}(0,0)$ is determined. Observe that $\rho''_{AB}(w_A, w_B) = \rho''_{BA}(w_A, w_B)$. Using (72), the force is given by,

$$\mathbf{F}''_{AB} = -\frac{k_G m'_A m'_B}{(\rho''_{AB}(0,0)^2 + z^2)} \left[\frac{dV}{dV''} \right]_A \left[\frac{dV}{dV''} \right]_B \hat{\mathbf{v}}''_{AB} \quad (99)$$

where

$$\left[\frac{dV}{dV''} \right]_A = \frac{(c^2 + w_{A0}^2 (\rho''_{AB}(0,0) - r_B \sin \zeta)^2 e^{-2(\lambda (\rho''_{AB}(0,0) - r_A - r_B \cos \zeta) + \mu (z_{AB} - r_B \sin \zeta))})^{\frac{3}{2}}}{c(c^2 + \lambda w_{A0}^2 (\rho''_{AB}(0,0) - r_B \cos \zeta))^3 e^{-2(\lambda (\rho''_{AB}(0,0) - r_A - r_B \cos \zeta) + \mu (z_{AB} - r_B \sin \zeta))}} \quad (100)$$

$$\left[\frac{dV}{dV''} \right]_B = \frac{(c^2 + w_{B0}^2 r_B^2)^{\frac{3}{2}}}{c^3} \quad (101)$$

Where $\sin \zeta = \frac{z_{AB}}{AB}$ and (101) is given by the no slippage case since on the surface of

body B the angular velocity is w_{B0} ..and where the unit vector is given by,

$$\hat{\mathbf{v}}''_{AB} = (\sin \xi''_{AB}(w_A, w_B) \cos(\varphi''_A + \theta''_B), \sin \xi''_{AB}(w_A, w_B) \sin(\varphi''_A + \theta''_B), \cos \xi''_{AB}(w_A, w_B)) \quad (102)$$

Notice that when $\lambda = \mu = 0$ we return to the relations of Case A.II as expected.

Using simpler notation $t''_{AB} = t_{AB} = \frac{\sqrt{\rho''_{AB}(0,0)^2 + z_{AB}^2}}{c}$ and

$$\tan \xi''_{AB}(0,0) = \tan \xi_{AB}(0,0) = \tan \xi_{AB} = \frac{\rho''_{AB}(0,0)}{z_{AB}} \text{ we find } \tan \varphi''_A \text{ from (53).}$$

$$\tan \varphi_A'' = \frac{w_A t_{AB} (1 + w_A^2 t_{AB}^2 \sin^2 \xi)}{1 + c \beta_{AB} t_{AB}^3 w_A^2 \sin^2 \xi} = \frac{w_A \sqrt{\rho_{AB}''(0,0)^2 + z_{AB}^2}}{c} \frac{1 + \frac{w_A^2 \rho_{AB}''(0,0)^2}{c^2}}{1 + \frac{w_A^2 \rho_{AB}''(0,0)^2 (\lambda \rho_{AB}''(0,0) + \mu z_{AB})}{c^2}}$$

(103)

Then we calculate $\theta_B'' = \int_0^{t_{AB}} w_{B0} e^{-ct\beta_{AB}} dt = \theta_B = \int_0^{t_{AB}} w_{B0} e^{-ct\beta_{AB}} dt = \frac{w_{B0}}{c\beta_{AB}} (1 - e^{-ct_{AB}\beta_{AB}})$

From (54)

$$\tan \xi_{AB}''(w_A, 0) = \tan \xi_{AB}(0, 0) \frac{\sqrt{(1 + w_A^2 t_{AB}^2 \sin^2 \xi_{AB}(0, 0))^2 + (1 + c \beta_{AB} t_{AB}^3 w_A^2 \sin^2 \xi_{AB}(0, 0))^2}}{(1 + w_A^2 t_{AB}^2 \sin^2 \xi_{AB}(0, 0))^{\frac{3}{2}}} \quad (104)$$

To determine $\tan \xi_{AB}''(w_A, w_B)$, which is needed to determine the unit vector in (99) we follow a similar approach to that for the case A.II above,

The only difference is in the calculation of the derivative of the radial distance,

$$\frac{d\rho_{BA}''(w_A, w_B)}{dt} = \frac{c \sin \xi_{BA}(0, 0) (1 + c \beta_{BA} t_{BA}^3 (w_A^2 + w_B^2) \sin^2 \xi_{BA}''(0, 0))}{(1 + (w_A^2 + w_B^2) t_{BA}^2 \sin^2 \xi_{BA}''(0, 0))^{\frac{3}{2}}} \quad (105)$$

Where we observe that $\beta_{AB} = \beta_{BA}$, $t_{AB} = t_{BA}$,

$$\sin \xi_{BA}(0, 0) = \sin \xi_{AB}(0, 0) = \sin \xi_{AB}''(0, 0) = \sin \xi_{BA}''(0, 0).$$

After some calculation as in A.II we find for a signal traveling from B to A, while both A and B are rotating,

$$\tan \varphi_{BA}'' = \frac{w_B \rho_{BA}''(w_A, w_B)}{d\rho_{BA}''(w_A, w_B)} = \frac{w_B t_{BA} (1 + (w_A^2 + w_B^2) t_{BA}^2 \sin^2 \xi_{BA}''(0, 0))}{1 + c \beta_{BA} t_{BA}^3 (w_A^2 + w_B^2) \sin^2 \xi_{BA}''(0, 0)} \quad (106)$$

$$\tan \xi_{BA}''(w_A, w_B) = \tan \xi_{BA}''(0, 0) \frac{w_B t_{BA}}{\sqrt{1 + (w_A^2 + w_B^2) t_{BA}^2 \sin^2 \xi_{BA}''(0, 0)}} \sqrt{1 + \frac{(1 + c \beta_{BA} t_{BA}^3 (w_A^2 + w_B^2) \sin^2 \xi_{BA}''(0, 0))^2}{w_B^2 t_{BA}^2 (1 + (w_A^2 + w_B^2) t_{BA}^2 \sin^2 \xi_{BA}''(0, 0))^2}}$$

(107)

Also written as

$$\tan \xi_{BA}''(w_A, w_B) = \tan \xi_{BA}''(0, 0) \frac{\sqrt{w_B^2 t_{BA}^2 (1 + (w_A^2 + w_B^2) t_{BA}^2 \sin^2 \xi_{BA}''(0, 0))^2 + (1 + c \beta_{BA} t_{BA}^3 (w_A^2 + w_B^2) \sin^2 \xi_{BA}''(0, 0))^2}}{(1 + (w_A^2 + w_B^2) t_{BA}^2 \sin^2 \xi_{BA}''(0, 0))^{\frac{3}{2}}}$$

(108)

$$v_{C,BA} = \frac{c \cos \xi_{BA}''(0, 0)}{\cos \xi_{BA}''(w_A, w_B)} \quad (109)$$

It follows that for a signal traveling from A to B when both A and B are rotating the angle of inclination to the z axis is,

$$\tan \xi_{AB}''(w_A, w_B) = \tan \xi_{AB}''(0, 0) \frac{\sqrt{w_A^2 t_{AB}^2 (1 + (w_A^2 + w_B^2) t_{AB}^2 \sin^2 \xi_{AB}''(0, 0))^2 + (1 + c \beta_{AB} t_{AB}^3 (w_A^2 + w_B^2) \sin^2 \xi_{AB}''(0, 0))^2}}{(1 + (w_A^2 + w_B^2) t_{AB}^2 \sin^2 \xi_{AB}''(0, 0))^{\frac{3}{2}}}$$

(110)

And we substitute in (102) to determine the direction of $\hat{\mathbf{v}}''_{AB}$, which points opposite to the direction of the force.

4 Visualization of the signals' path for observers O' and O'' and the attractive-repulsive effect

In Figure 1 (d) and 1 (c) the curved path from A to B shows how the signal travels from A to B for the case of rotations in the same direction and in the opposite direction. Let us expand on that in Figure 3.

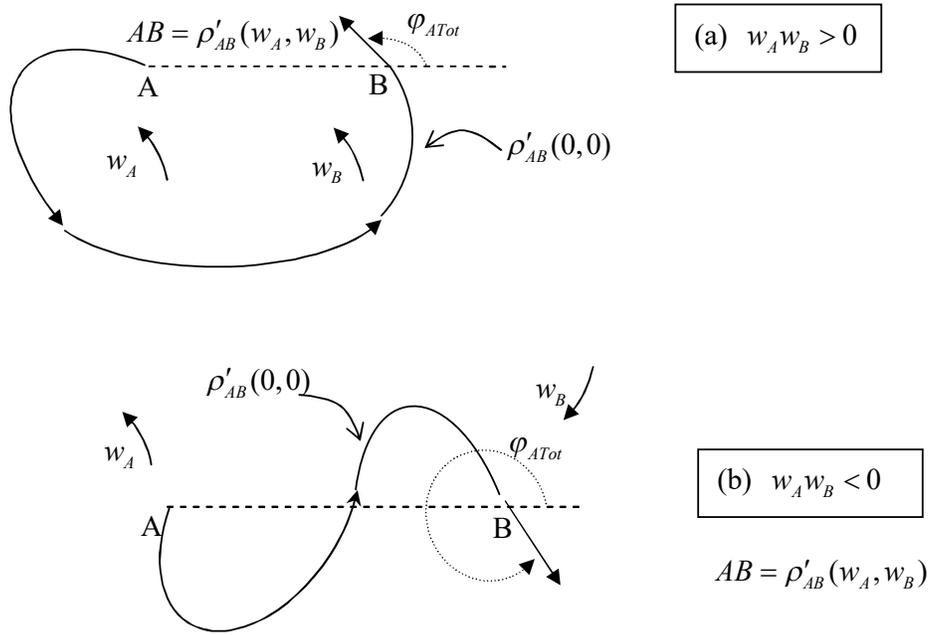
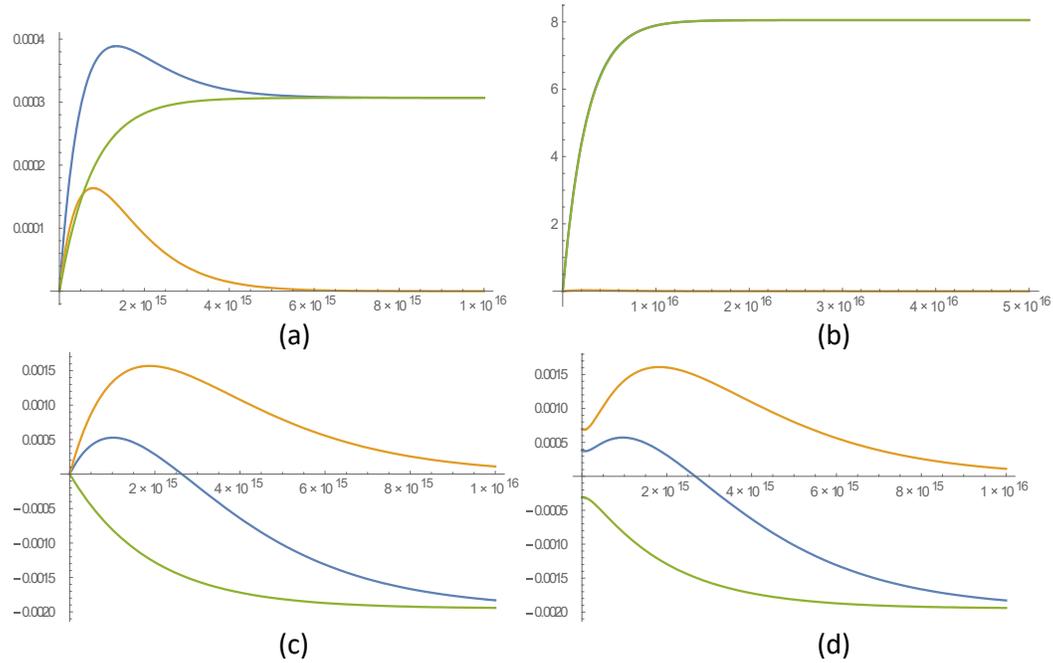


Figure 3 Assuming that bodies A,B are both within the reach of each other's G field, the signals' path from body A to body B is shown by the curved (or possibly winding) path with length $\rho'_{AB}(0,0)$. The straight line distance observed by observer O' , is $\rho'_{AB}(w_A, w_B)$ or $\rho''_{AB}(w_A, w_B)$ for observer O'' . By convention angles are positive counterclockwise and rotation is positive counterclockwise. **(a)** When they are rotating in the same direction the angle of deflection φ_A increases to $\varphi_{ATot} = \varphi_A + \theta'_B$ or ($\varphi_{ATot} = \varphi_A + \theta''_B$). **(b)** When they are rotating in the opposite direction the angle of deflection φ_A decreases to $\varphi_{ATot} = \varphi_A + \theta'_B$ or $\varphi_{ATot} = \varphi_A + \theta''_B$ (since $\theta'_B < 0$). Recall that $\theta_B = \theta'_B = \theta''_B$. According to the direction φ_{ATot} points it may also be attractive or repulsive and accelerating or decelerating.

Assume that angles are positive in the counterclockwise direction and so are the angular velocities. The angle of deflection φ_A is measured starting from the extension of line AB. When $w_A \geq 0$, the signals of a \mathbf{G} field produced by a rotating body A will fall on a non rotating body B with angle of deflection $\varphi_A \leq \frac{\pi}{2}$. If body B is rotating, the angle of deflection will change to $\varphi_{ATot} = \varphi_A + \theta_B$ (and will increase or decrease according to the sign of θ_B). If ($0 \leq \varphi_{ATot} \leq 90^\circ$) the resulting \mathbf{G} field and force exerted on B will be attractive and decelerating. If $90^\circ \leq \varphi_{ATot} \leq 180^\circ$ it will be repulsive and decelerating. For $180^\circ \leq \varphi_{ATot} \leq 270^\circ$ it will be repulsive and accelerating and for $270^\circ \leq \varphi_{ATot} \leq 360^\circ$ it will be attractive and accelerating. In all cases above acceleration is with respect to counterclockwise orbital motion. If the orbital motion is clockwise then deceleration in the counterclockwise direction is equivalent to acceleration in the clockwise direction. If w_B is big enough it will result in winding of signals around body B and thus there will be ranges of w_B where the \mathbf{G} field will have the above properties. In Figure 3(a) we see the case when both bodies rotate in the same direction and in Figure 3(b) when they rotate in opposite directions. The above discussion holds for both cases.

Figure 4 presents in blue the plot of the total angle of deflection for rotation with slippage, $\varphi''_{ATot} \triangleq \varphi''_A + \theta_B$ in radians versus $\rho = \rho''_{AB}(0,0)$ for various cases



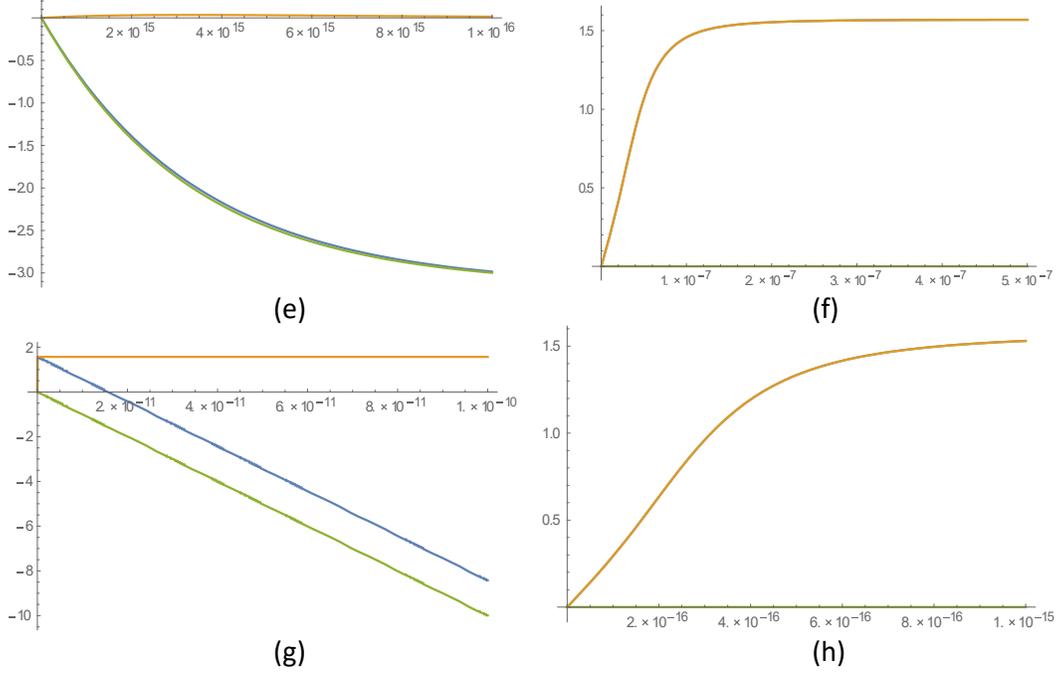


Figure 4 The graph of the total angle of deflection $\varphi''_{ATot} = \varphi''_A + \theta_B$ (blue) vs ρ . Also the graph of φ''_A in orange and θ_B in green. (a), (b), (c), (d), (e) are macrocosmos cases while (f), (g), (h) are microcosmos examples. In particular, (a) $w_{A0} \approx 2.16 * 10^{-10}$ rad/s, $w_{B0} \approx 1.64 * 10^{-10}$ rad/s, $\lambda \approx 1.68 * 10^{-15}$ m⁻¹, $z \approx 1.27 * 10^{14}$ m, the total angle of deflection remains positive for all ρ but does not exceed $\pi / 2$. (b) $w_{A0} \approx 9.26 * 10^{-9}$ rad/s, $w_{B0} \approx 9.4 * 10^{-7}$ rad/s, $\lambda \approx 3.89 * 10^{-16}$ m⁻¹, $z \approx 0$ m. The total deflection angle spans values from 0 to 8 in radians. Therefore, it is attractive-repulsive and accelerating-decelerating for the ranges explained above. (c) $w_{A0} \approx 6.82 * 10^{-10}$ rad/s, $w_{B0} \approx -3.12 * 10^{-10}$ rad/s, $\lambda \approx 5.27 * 10^{-16}$ m⁻¹, $z \approx 0$ m. Body B rotates with negative sign. The total angle of deflection takes both positive and negative values depending on the distance but remains within $(\pi / 2, -\pi / 2)$ and hence it is always attractive. (d) This is the same as (c) only $z = 3.01 * 10^{14}$ m. (e) $w_{A0} \approx 8.52 * 10^{-9}$ rad/s, $w_{B0} \approx -2.84 * 10^{-7}$ rad/s, $\lambda \approx 3 * 10^{-16}$ m⁻¹, $z \approx 0$ m. The total angle of deflection spans $(0, -\pi / 2)$ and $(-\pi / 2, -3)$. (f) $w_{A0} \approx 5.7 * 10^{15}$ rad/s, $w_{B0} \approx -1 * 10^{15}$ rad/s, $\lambda \approx 1 * 10^{-10}$ m⁻¹, $z \approx 0$ m. The total angle of deflection spans $(0, \pi / 2)$ where it is attractive, (g) $w_{A0} \approx 3 * 10^{23}$ rad/s, $w_{B0} \approx -3 * 10^{19}$ rad/s, $\lambda \approx 1 * 10^{-4}$ m⁻¹, $z \approx 0$ m. The total angle of deflection spans $(-2, 8)$ as the distance varies from 0 to 10^{-10} . The space where the total angle of deflection takes values is segmented to $(2, \pi / 2)$ where it is repulsive, $(\pi / 2, -\pi / 2)$, $(-\pi / 2, -3\pi / 2)$, $(-3\pi / 2, -5\pi / 2)$, $(-5\pi / 2, 8)$ being attractive – repulsive, accelerating-decelerating as we explained above. (h) $w_{A0} \approx 8.4 * 10^{23}$ rad/s, $w_{B0} \approx -3 * 10^{24}$ rad/s, $\lambda \approx 5 * 10^{-9}$ m⁻¹, $z \approx 0$ m. For distances from 0 to 10^{-15} m the total angle of deflection is virtually equal to the angle of deflection that is due to the rotation of body A only and varies from 0 to $\pi / 2$.

5 Interaction of two spinning bodies with axes not parallel

Until now we have assumed that the axes of rotation of the two bodies were parallel. This was done for simplicity and in order to understand the problem better by approaching it stepwise. Now we will look at the general situation, when the axes of rotation of the two bodies are not parallel. Figure 4 (a) and (b) shows the setup.

We imagine a body A rotating around axis Z_1 . The plane perpendicular to Z_1 at A is called the plane of rotation and is denoted as PL1. Similarly a body B rotates around an axis Z_2 and the plane of rotation is PL2. PL1 and PL2 intersect at XX' with angle ϕ . A signal from A to B travels a curved path. The tangent to this curve at B is extended tangentially to some point F. The straight line from A to B is extended to E. Let a plane PL1' parallel to PL1 pass through point B (PL1' is not shown in Figure 4(a)). The projection of E on PL1' is E_1 (not shown) and the projection on PL2 is E_2 . The projection of F on PL1' is F_1 (not shown) and on PL2 is F_2 . Angle $\angle E_1BF_1 = \varphi_1$ and angle $\angle F_2BE_2 = \varphi_2$. Also angle $\angle Z'_1BF = \xi_{F_1}$ (not shown, where Z'_1 is a line parallel to axis Z_1 passing through B) and $\angle Z_2BF = \xi_{F_2}$. Further, we observe that starting from A with cylindrical coordinates, point B is at height z_1 and radial distance ρ_1 , while starting from B, point A is at height z_2 and radial distance ρ_2 . The plane that contains Z_2 and passes through A, contains also E (since A, B lie on this plane and E lies on the extension of AB). This plane crosses XX' at Q. AL is drawn perpendicular to XX' . The angle $\angle LAQ = u_1$ is the azimuth angle of B with respect to the cylindrical coordinate system that has origin at A and axis Z_1 . The azimuth angle is measured looking down from Z_1 counterclockwise starting from AL (the perpendicular from A to XX'). The angle $\angle AQL = \gamma_{E_1} = 90^\circ - u_1$

Now our strategy is as follows. We let body B not rotate for the moment and we transform $\varphi_1, \xi_{F_1}, \rho_1, z_1, u_1$, to $\varphi_2, \xi_{F_2}, \rho_2, z_2, u_2$. After that we will let B rotate and see how $\varphi_2, \xi_{F_2}, \rho_2, z_2, u_2$ are changed by the rotation.

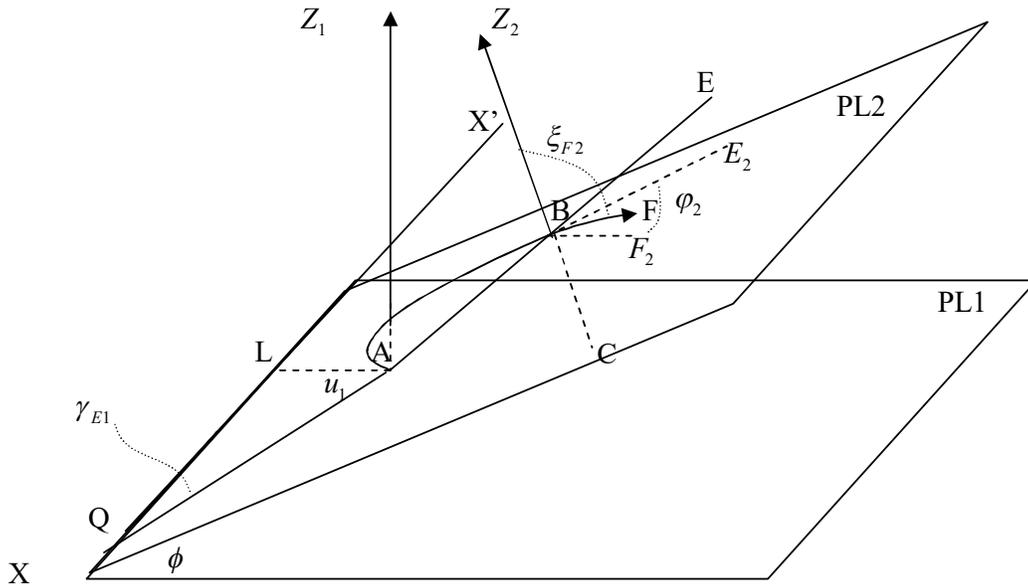


Figure 4(a) Body A rotates with axis of rotation Z_1 and plane of rotation PL1. Body B has axis of rotation Z_2 and plane of rotation PL2. The signal that travels from A to B is shown by the curve that passes through A and B. Taking the tangent at B we extend it to F. AB is the straight line from A to B which is extended to E. Angle $\angle Z_2BF = \xi_{F_2}$. The projections of E, F on PL2 are E_2, F_2 , respectively. Angle $\angle E_2BF_2 = \phi_2$, the angle of deflection on PL2. Angle $\angle LAQ = u_1$ is the azimuth angle of Z_2 with respect to cylindrical coordinate system Z_1 with origin at A. The angle between PL1 and PL2 is ϕ .

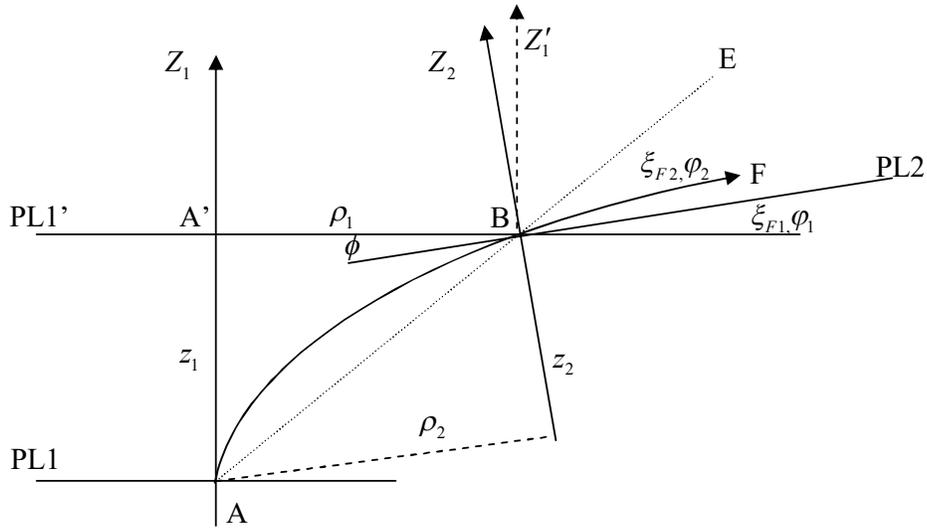


Figure 4(b) This is a schematic side view of a section of Figure 4(a). The tangent to the signal path at B and the straight line from ABE form an angle in space with vertex at B. The projection of this angle ($\angle EBF$) on PL1 forms the angle ϕ_1 while the projection on PL2 forms the angle ϕ_2 . Also the tangent to the curve (A,B) at B forms an angle ξ_{F1} with Z'_1 ($\angle Z'_1BF$), while the same forms an angle ξ_{F2} with PL2 ($\angle Z_2BF$). Further, starting from A with cylindrical coordinates, B is at height z_1 and radial distance ρ_1 and azimuth angle u_1 . While starting from B with cylindrical coordinates the point A is at a height z_2 and radial distance ρ_2 and azimuth angle u_2 . PL1' is a plane parallel to PL1 that passes through B.

We will use two Lemmas from Geometria proven in Appendix A to show how $\phi_2, \xi_{F2}, \rho_2, z_2$ are related to $\phi_1, \xi_{F1}, \rho_1, z_1$. Draw plane PL1' parallel to PL1 passing through body B. The planes PL2 and PL1' refer us to Lemma 1 of Appendix A. We know that $\angle E_1BX = \gamma_{E1}$ and we call $\angle E_2BX = \gamma_{E2}$, $\angle F_1BX = \gamma_{F1}$ and $\angle F_2BX = \gamma_{F2}$. We also know that

$$\gamma_{E1} - \gamma_{F1} = \phi_1 \quad (111)$$

$$\gamma_{E2} - \gamma_{F2} = \phi_2 \quad (112)$$

$$\gamma_{E1} = \frac{\pi}{2} - u_1 \quad (113)$$

And from Lemma 1, noting that $\xi_1 = \frac{\pi}{2} - x_1$ and $\xi_2 = \frac{\pi}{2} - x_2$

$$\tan \gamma_{E2} = (\sin \phi \frac{\cot \xi_{E1}}{\sin \gamma_{E1}} + \cos \phi) \tan \gamma_{E1} \quad (114)$$

$$\tan \gamma_{F2} = (\sin \phi \frac{\cot \xi_{F1}}{\sin \gamma_{F1}} + \cos \phi) \tan \gamma_{F1} \quad (115)$$

$$\tan \xi_{E1} = \frac{\rho_1}{z_1} \quad (116)$$

$$\cos \xi_{E2} = \cos \phi \cos \xi_{E1} - \sin \xi_{E1} \sin \gamma_{E1} \sin \phi = \cos \phi \frac{\rho_1}{\sqrt{\rho_1^2 + z_1^2}} - \sin \phi \frac{z_1}{\sqrt{\rho_1^2 + z_1^2}} \cos u_1 \quad (117)$$

$$\cos \xi_{F2} = \cos \phi \cos \xi_{F1} - \sin \xi_{F1} \sin \gamma_{F1} \sin \phi = \cos \phi \cos \xi_{F1} - \sin \xi_{F1} \cos(u_1 + \varphi_1) \sin \phi \quad (118)$$

Using (114), (113), (116) we find $\tan \gamma_{E2}$

We use (115) and (111) to find $\tan \gamma_{F2}$. From these we may find φ_2 since $\gamma_{E2} - \gamma_{F2} = \varphi_2$

Now we use Lemma 2 of Appendix A to find

$$z_2 = -z_1 \cos \phi - \rho_1 \cos u_1 \sin \phi \quad (119)$$

$$\rho_2^2 = \rho_1^2 (1 - \cos^2 u_1 \sin^2 \phi) + z_1^2 \sin^2 \phi - 2z_1 \rho_1 \sin \phi \cos \phi \cos u_1 \quad (120)$$

$$\sin u_2 = -\frac{\rho_1}{\rho_2} \sin u_1 \quad (121)$$

Finally, we allow body B to rotate around Z_2 and use : For rotation without slippage, use either (66) to (70) to determine ρ_2' , or (76) to (79), to determine ρ_2'' from ρ_2 .

Similarly, for rotation without slippage use (97) and (98) to determine ρ_2'' . For example, to determine ρ_2'' for rotation without slippage,

$$\rho_{2.AB}''(w_A, w_B) = \rho_{2.AB}''(w_A, 0) \frac{c}{\sqrt{c^2 + w_B^2 \rho_{2.AB}''^2(w_A, 0)}} \quad (122)$$

$$\rho_{1.AB}''(w_A, 0) = \rho_{1.AB}''(0, 0) \frac{c}{\sqrt{c^2 + w_A^2 \rho_{1.AB}''^2(0, 0)}} \quad (123)$$

And the procedure is: Start from $\rho_{1.AB}''(0, 0)$ use (123) to find $\rho_{1.AB}''(w_A, 0)$. Then use (119), (120), (121) to change coordinates and determine $\rho_{2.AB}''(w_A, 0)$ and then use (122)

to finally get $\rho_{2.AB}''(w_A, w_B)$. Similarly, for $\rho_{2.AB}'(w_A, w_B)$, $z_{2.AB}'(w_A, w_B)$, $z_{2.AB}''(w_A, w_B)$

Also, the angle of deflection $\varphi_{2.AB}$, will be increased by $\theta'_B = w'_B t_{AB}$ and $\theta''_B = w_B t_{AB}$,

respectively where $t_{AB} = \frac{\sqrt{\rho_{1.AB}'^2(0, 0) + z_{1.AB}^2(0, 0)}}{c}$.

6 Conclusion

The force acting on a body rotating that is due to the field created by another rotating body is in general not central and not symmetric. Its magnitude and direction depends

not only on the \mathbf{G} field created by the other rotating body but also on its own mass, and rotation . The Force is calculated for the cases of close and far away observers and for the case of angular velocity of signals constant or exponentially decreasing with respect to distance. Finally, we use geometry to show how we may calculate the force, when the axes of rotation of the two interacting bodies are not parallel.

7 References

1. Møller C., *The Theory of Relativity*, Oxford, 1952
2. Pechlivanides P. *On Rotating Frames and the Relativistic contraction of the Radius*, <http://vixra.org/abs/1411.0229>, 2014
3. Pechlivanides P. *The Relativistic Field of a Rotating Body*, <http://vixra.org/abs/1703.0213>, 2017

Appendix A

Lemmas from Geometria

Lemma 1

Let two planes PL1 and PL2 intersect along a line XX' and the angle of intersection be ϕ . Draw a line from a point A on XX' to any point C. Let the projection of AC on PL1 be AB. and the projection of AC on PL2 be AD. Call angles $\angle CAB = x_1$, $\angle CAD = x_2$. Draw a plane through C vertical to XX' . Let it cross XX' at E. Call angles $\angle EAB = \gamma_1$, $\angle EAD = \gamma_2$, $\angle CEB = \vartheta_1$, $\angle CED = \vartheta_2$. Then

$$(1) \quad \cos x_1 \cos \gamma_1 = \cos x_2 \cos \gamma_2 \quad (\text{A.124})$$

$$(2) \quad \tan \vartheta_1 = \frac{\tan x_1}{\sin \gamma_1}, \tan \vartheta_2 = \frac{\tan x_2}{\sin \gamma_2} \quad (\text{A.125})$$

$$(3) \quad \sin x_2 = \cos x_1 \sin \gamma_1 \frac{\sin \vartheta_2}{\cos \vartheta_1}, \sin x_1 = \cos x_2 \sin \gamma_2 \frac{\sin \vartheta_1}{\cos \vartheta_2} \quad (\text{A.126})$$

$$(4) \quad \tan \gamma_2 = \tan \gamma_1 \frac{\cos \vartheta_2}{\cos \vartheta_1} \quad (\text{A.127})$$

Proof:

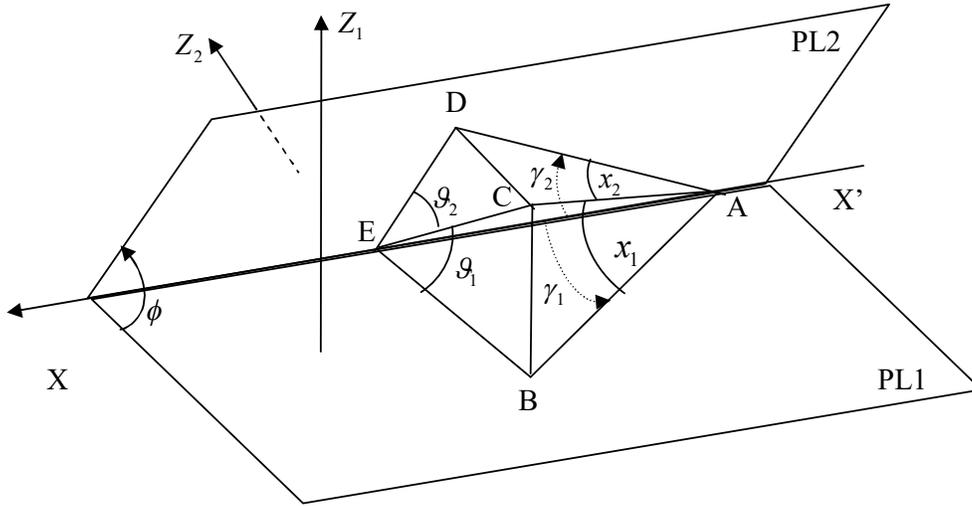


Figure A-1

The plane perpendicular to XX' that passes through C will pass through D, B (because D, B are the projections of C on the two planes respectively). (see Figure A-1)

(1) To prove the first equation observe that triangle CAB is orthogonal at B , triangle ABE is orthogonal at E and also triangle CDA is orthogonal at B , triangle DEA is orthogonal at E . Hence,

$$AE = AC \cos x_1 \cos \gamma_1 = AC \cos x_2 \cos \gamma_2$$

From which the equation to be proved follows

(2) To prove the second equation

$$\tan \theta_1 = \frac{CB}{BE} = \frac{AC \sin x_1}{AC \cos x_1 \sin \gamma_1} = \frac{\tan x_1}{\sin \gamma_1}$$

And

$$\tan \theta_2 = \frac{CD}{DE} = \frac{AC \sin x_2}{AC \cos x_2 \sin \gamma_2} = \frac{\tan x_2}{\sin \gamma_2}$$

(3) To prove the third equation

$$\sin x_2 = \frac{CD}{AC} = \frac{CE \sin \theta_2}{AC} = \frac{BE \sin \theta_2}{AC \cos \theta_1}$$

But $BE = AC \cos x_1 \sin \gamma_1$, hence,

$$\sin x_2 = \frac{\cos x_1 \sin \gamma_1 \sin \theta_2}{\cos \theta_1}$$

The second equation of (3) follows by symmetrical arguments

(4) To prove the fourth equation

$$\tan \gamma_2 = \frac{ED}{AE}$$

$$ED = EC \cos \vartheta_2$$

$$AE = AB \cos \gamma_1$$

$$\sin \gamma_1 = \frac{EB}{AB}$$

$$EB = EC \cos \vartheta_1$$

From the above equations use the first four to solve for $\tan \gamma_2$ and find

$$\tan \gamma_2 = \frac{EC}{EB} \cos \vartheta_2 \tan \gamma_1$$

And use the fifth to substitute for $\frac{EC}{EB}$ and obtain,

$$\tan \gamma_2 = \frac{\cos \vartheta_2}{\cos \vartheta_1} \tan \gamma_1$$

(QED)

Lemma 1 tells us how to find the projection angles of a line on Plane 2 when we know the projection angles on Plane 1 and the angle between the planes.

Discussion

The angles ϑ_1 and ϑ_2 are related to ϕ . In fact, the formulas in (3) and (4) of Lemma 1 can be further manipulated and expressed in terms of ϕ . To do this we must look at the two planes from X towards X' and make some definitions about orientations.

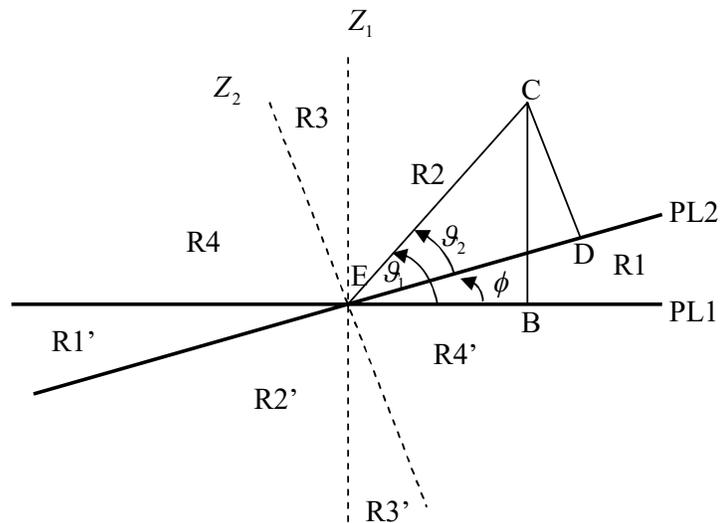


Figure A-2

Given a plane PL1 we draw a vertical pointing in the Z direction and call it Z_1 and the same for PL2 and Z_2 . Given a line of intersection of PL1 and PL2 we call it XX' and define a direction towards X. In Figure C-2, XX' is vertical to the paper surface and X is on our side). The angle ϕ of intersection of PL1 and PL2 is zero when Z_1 and Z_2 are parallel both pointing in the same direction and the half planes PL1 and PL2 coincide. Angle ϕ is measured counterclockwise as we look from X towards X' starting from PL1 and ending at PL2.(see Figure A-2).

We draw a plane X_1 through the intersection of PL1 and PL2 (XX') that is vertical to PL1 (X_1 contains Z_1). We also draw a plane X_2 through the intersection of PL1 and PL2 (XX') that is vertical to PL2 (X_2 contains Z_2). This way space is divided in eight regions: R1, R1', R2, R2', R3, R3', R4, R4'(see Figure C-2)

Observe that varying x_1, γ_1 so that $-\frac{\pi}{2} \leq x_1 \leq \frac{\pi}{2}$ and $0 \leq \gamma_1 \leq 2\pi$ spans the surface of a sphere. In fact, x_1, γ_1 are the angles used in spherical coordinates. The same is true for x_2, γ_2 , where $x_1 = 0$ when AC lies on PL1 and it is positive in the positive side of Z_1 ; and γ_1 is measured counterclockwise looking down from Z_1 , starting from AX towards AB. Similarly, $x_2 = 0$ when AC lies on PL2 and it is positive on the positive side of Z_2 , while γ_2 is measured counterclockwise as we look down from Z_2 on PL2 and starting from AX towards AD.

Also, $\vartheta_1 = 0$ when AC lies on PL1 where $-\frac{\pi}{2} \leq \vartheta_1 \leq \frac{\pi}{2}$ being positive on the positive side of Z_1 , and $\vartheta_2 = 0$ when AC lies on PL2 where $-\frac{\pi}{2} \leq \vartheta_2 \leq \frac{\pi}{2}$ being positive on the positive side of Z_2

We summarize all this in the following table

Region	$\vartheta_1,$ x_1	$\vartheta_2,$ x_2	γ_1	γ_2	$\vartheta_1 - \vartheta_2$
R1	+	-	$0 \leq \gamma_1 \leq \pi$	$0 \leq \gamma_2 \leq \pi$	$\vartheta_1 - \vartheta_2 = \phi$
R1'	-	+	$\pi \leq \gamma_1 \leq 2\pi$	$\pi \leq \gamma_2 \leq 2\pi$	$\vartheta_1 - \vartheta_2 = -\phi$
R2	+	+	$0 \leq \gamma_1 \leq \pi$	$0 \leq \gamma_2 \leq \pi$	$\vartheta_1 - \vartheta_2 = \phi$
R2'	-	-	$\pi \leq \gamma_1 \leq 2\pi$	$\pi \leq \gamma_2 \leq 2\pi$	$\vartheta_1 - \vartheta_2 = -\phi$
R3	+	+	$\pi \leq \gamma_1 \leq 2\pi$	$0 \leq \gamma_2 \leq \pi$	$\vartheta_1 + \vartheta_2 = \phi$
R3'	-	-	$0 \leq \gamma_1 \leq \pi$	$\pi \leq \gamma_2 \leq 2\pi$	$\vartheta_1 + \vartheta_2 = -\phi$
R4	+	+	$\pi \leq \gamma_1 \leq 2\pi$	$\pi \leq \gamma_2 \leq 2\pi$	$\vartheta_1 - \vartheta_2 = -\phi$
R4'	-	-	$0 \leq \gamma_1 \leq \pi$	$0 \leq \gamma_2 \leq \pi$	$\vartheta_1 - \vartheta_2 = \phi$

Table A-1 The + sign in columns for (ϑ_1, x_1) and (ϑ_2, x_2) indicates that the quantities are non-negative, while the - sign that they are non-positive.

(a) When C lies in R1 equation (A.126) of Lemma 1 becomes

$$-\sin x_2 = \cos x_1 \sin \gamma_1 \frac{-\sin \mathcal{G}_2}{\cos \mathcal{G}_1} \quad \text{but in R1 } \mathcal{G}_1 - \mathcal{G}_2 = \phi \text{ and hence,}$$

$$\sin x_2 = \cos x_1 \sin \gamma_1 \frac{\cos \phi \sin \mathcal{G}_1 - \sin \phi \cos \mathcal{G}_1}{\cos \mathcal{G}_1} = \cos x_1 \sin \gamma_1 (\cos \phi \tan \mathcal{G}_1 - \sin \phi)$$

Using (A.125) of Lemma 1 which in R1 becomes $\tan \mathcal{G}_1 = \frac{\tan x_1}{\sin \gamma_1}$ we obtain,

$$\sin x_2 = \cos \phi \sin x_1 - \cos x_1 \sin \gamma_1 \sin \phi \quad (\text{A.128})$$

And similarly,

$$\sin x_1 = \cos \phi \sin x_2 + \cos x_2 \sin \gamma_2 \sin \phi \quad (\text{A.129})$$

Observe here that if we replace ϕ by $-\phi$ to indicate the reverse transformation then (A.129) becomes symmetric to (A.128). Namely,

$$\sin x_1 = \cos \phi \sin x_2 - \cos x_2 \sin \gamma_2 \sin \phi \quad (\text{A.130})$$

Also (A.127) becomes

$$\tan \gamma_2 = \left(\sin \phi \frac{\tan x_1}{\sin \gamma_1} + \cos \phi \right) \tan \gamma_1 \quad (\text{A.131})$$

And

$$\tan \gamma_1 = \left(\cos \phi + \sin \phi \frac{-\tan x_2}{\sin \gamma_2} \right) \tan \gamma_2 = \left(\cos \phi - \sin \phi \frac{\tan x_2}{\sin \gamma_2} \right) \tan \gamma_2 \quad (\text{A.132})$$

Again if we replace ϕ by $-\phi$ to indicate the reverse transformation we end up with a relation symmetrical to (A.131)

If we repeat the calculations for the remaining regions R1', R2, R2', R3, R3', R4, R4', we find that the same relations (A.128), (A.129), (A.130), (A.131), (A.132) continue to hold in all regions.

Lemma 2

Let two planes PL1 and PL2 intersect along line XX' with an angle $0 \leq \phi \leq 90^\circ$. Let a line Z_1 , perpendicular to PL1, that crosses it at point A and a line Z_2 perpendicular to PL2 that crosses it at point B. Draw a line from B parallel to Z_1 that crosses PL1 at G. Draw the line AG and extend it until it crosses XX' at F. Call the line segments $AG = \rho_1$ and the line segment $BG = z_1$. Draw a line from A perpendicular to XX' that crosses it at L. Call the angle $\angle LAG = u$ (it is measured counterclockwise looking from Z_1 down on PL1, starting from AL and ending on AG). Draw a line from A perpendicular to Z_2 that crosses it at I. Call $BI = z_2$ and $AI = \rho_2$.

Then

(1)
$$z_2 = -z_1 \cos \phi - \rho_1 \cos u \sin \phi \tag{A.133}$$

(2)
$$\rho_2^2 = \rho_1^2 (1 - \cos^2 u \sin^2 \phi) + z_1^2 \sin^2 \phi - 2z_1 \rho_1 \sin \phi \cos \phi \cos u \tag{A.134}$$

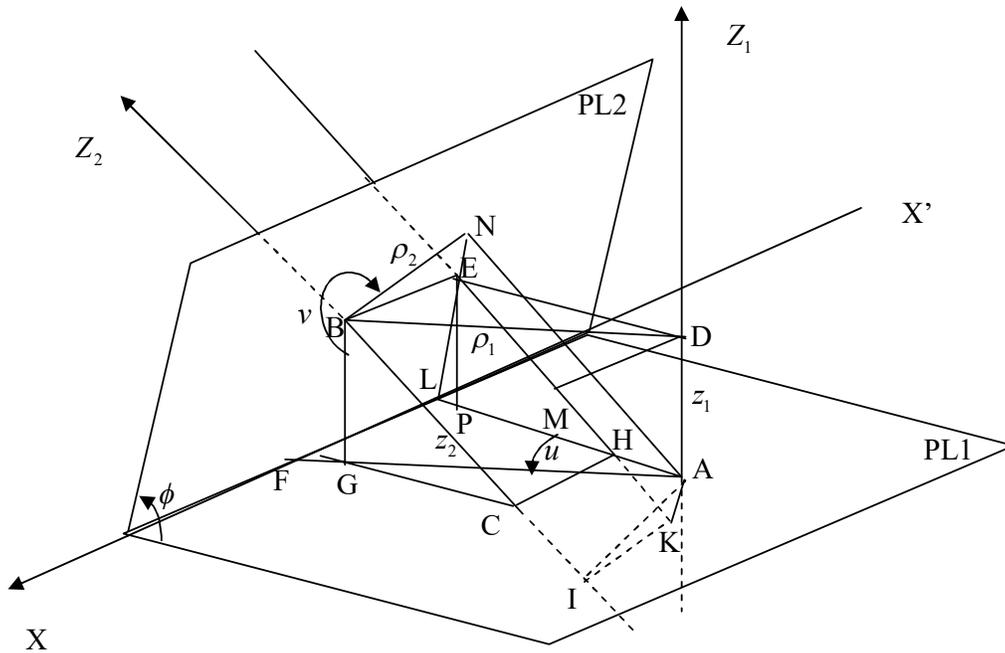


Figure A-3

Proof (using Figure A-3)

Draw a line from B parallel to XX' . Let the plane that passes through Z_1 and is perpendicular to XX' cross the previously drawn line at E. Draw ED parallel to AL. Draw a line from E perpendicular to PL1 that crosses it at P. The plane defined by BGC is perpendicular to PL1 and PL2 because BC lies on Z_2 which is perpendicular on PL2 and BG was drawn perpendicular to PL1. Therefore,

the plane defined by BGC is perpendicular to XX' and therefore it is parallel to the plane defined by EDLA . In fact EDAP is an orthogonal parallelogram and $AD=BG$. Draw a line through E parallel to Z_2 . It will cross LA at some point H. Draw a line from A perpendicular to the line defined by EH, and let it cross it at K. Also draw a line from D perpendicular to EH and let it cross it at M.

The plane defined by AKI is perpendicular to both Z_2 and its parallel line EMHK.

Therefore, EBIK is an orthogonal parallelogram and therefore, $BI=EK$, or

$$z_2 = EM + MK$$

Observe that by construction BDAG is orthogonal parallelogram and therefore angle $\angle LAG = \angle BDE = u$.

But $EM = \rho_1 \cos u \sin \phi$ because triangle BED is orthogonal and angle $\angle BDE = u$ and also triangle DEM is orthogonal and angle $\angle DEM = \frac{\pi}{2} - \phi$. To show that angle

$\angle DEM = \frac{\pi}{2} - \phi$ observe that angle $\angle EDM = \phi$ because its sides are perpendicular to lines (Z_1 , and EMHK) that are perpendicular to the two planes (PL1, PL2) that cross with angle ϕ .

Also MK is the projection of AD (which is equal to z_1) on line EMHK which was drawn parallel to Z_2 . The angle between the two line EMHK and Z_1 is ϕ because each is perpendicular to the two plane PL1 and PL2 that cross at angle ϕ . Hence

$$MK = z_1 \cos \phi$$

Gathering things together we obtain $|z_2| = z_1 \cos \phi + \rho_1 \cos u \sin \phi$. But z_2 lies in the negative semi axis of Z_2 and therefore we may write $z_2 = -z_1 \cos \phi - \rho_1 \cos u \sin \phi$ which proves (A.133)

To prove (A.134) observe that $AB^2 = \rho_1^2 + z_1^2 = \rho_2^2 + z_2^2$ and solve for ρ_2^2 using (A.133). (QED)

Discussion 1

Note that ρ_1, z_1 are the cylindrical coordinates of point B with respect to origin at A and axis Z_1 , while ρ_2, z_2 are the cylindrical coordinates of A with respect to origin at B and axis Z_2 . The azimuth angle is u for Z_1 and it is measured counterclockwise (as we look down from Z_1) starting from the plane that contains Z_1 and is vertical to PL2. In a similar fashion we define the azimuth angle for the cylindrical coordinate system Z_2 as v measured counterclockwise (as we look down from Z_2) starting from the plane that contains Z_2 and is vertical to PL1, (see Figure A-3).

The plane that passes through Z_2 and is vertical to PL1 includes CG . Let its extension cross XX' at Q and draw QB. Draw LE and extend it to some point N so that triangle BEN is parallel and equal to triangle AKI. Then $\rho_2 = AI = BN$ and $\angle NBE = \frac{3\pi}{2} - v$

We can easily see now that

$BE = GP = \rho_1 \sin u$ and also $BE = \rho_2 \cos(\frac{3\pi}{2} - v) = -\rho_2 \sin v$ and therefore

$$\rho_1 \sin u = -\rho_2 \sin v \quad (\text{A.135})$$

Further, we observe that $LE = LN - EN$ where

$LN = \frac{|z_2|}{\tan \phi}$, $EN = \rho_2 \sin(\frac{3\pi}{2} - v) = -\rho_2 \cos v$, $z_1 = PE \sin \phi$. Substituting above we

obtain,

$z_1 = \frac{|z_2|}{\tan \phi} \sin \phi - \rho_2 \cos v \sin \phi = |z_2| \cos \phi - \rho_2 \cos v \sin \phi$ and since z_2 is non positive

$$z_1 = -z_2 \cos \phi - \rho_2 \cos v \sin \phi \quad (\text{A.136})$$

Discussion 2

In the proof of Lemma 2 we assumed that $0 \leq \phi \leq 90^\circ$. If we define ϕ to be measured counterclockwise starting when the two half planes PL1, PL2 coincide and we look from X towards X', while the positive half axes Z_1, Z_2 coincide when $\phi = 0$, Then Lemma 2 continues to hold for all $0 \leq \phi \leq 360^\circ$. This is the same convention that we used for Lemma 1. Finally, Lemma 2 tells us how to change from one cylindrical coordinate system with coordinates (ρ_1, z_1, u) to another with coordinates (ρ_2, z_2, v)